

Edition 5.0 2019-05

INTERNATIONAL STANDARD

NORME INTERNATIONALE




INTERNATIONAL SPECIAL COMMITTEE ON RADIO INTERFERENCE COMITÉ INTERNATIONAL SPÉCIAL DES PERTURBATIONS RADIOÉLECTRIQUES

BASIC EMC PUBLICATION
PUBLICATION FONDAMENTALE EN CEM

Specification for radio disturbance and immunity measuring apparatus and methods –

Part 1-1: Radio disturbance and immunity measuring apparatus – Measuring apparatus

Spécifications des méthodes et des appareils de mesure des perturbations radioélectriques et de l'immunité aux perturbations radioélectriques – Partie 1-1: Appareils de mesure des perturbations radioélectriques et de l'immunité aux perturbations radioélectriques – Appareils de mesure

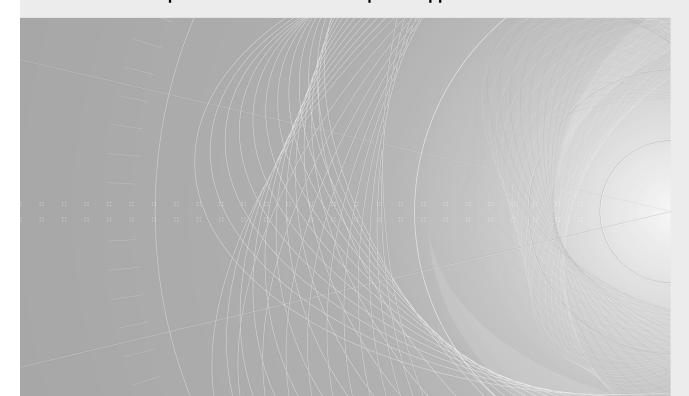



THIS PUBLICATION IS COPYRIGHT PROTECTED Copyright © 2019 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office Tel.: +41 22 919 02 11

3, rue de Varembé info@iec.ch CH-1211 Geneva 20 www.iec.ch

About the IEC

Switzerland

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC -

webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

67 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.



Edition 5.0 2019-05

INTERNATIONAL STANDARD

NORME INTERNATIONALE



INTERNATIONAL SPECIAL COMMITTEE ON RADIO INTERFERENCE COMITÉ INTERNATIONAL SPÉCIAL DES PERTURBATIONS RADIOÉLECTRIQUES

BASIC EMC PUBLICATION
PUBLICATION FONDAMENTALE EN CEM

Specification for radio disturbance and immunity measuring apparatus and methods –

Part 1-1: Radio disturbance and immunity measuring apparatus – Measuring apparatus

Spécifications des méthodes et des appareils de mesure des perturbations radioélectriques et de l'immunité aux perturbations radioélectriques – Partie 1-1: Appareils de mesure des perturbations radioélectriques et de l'immunité aux perturbations radioélectriques – Appareils de mesure

INTERNATIONAL ELECTROTECHNICAL COMMISSION

COMMISSION ELECTROTECHNIQUE INTERNATIONALE

ICS 33.100.10 ISBN 978-2-8322-6918-3

Warning! Make sure that you obtained this publication from an authorized distributor. Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

CONTENTS

F	OREWO	RD	7
IN	ITRODU	ICTION	10
1	Scop	e	11
2	Norm	native references	11
3	Term	s and definitions	12
4	Fund	amental characteristics of a measuring receiver	16
	4.1	General	
	4.2	Input impedance	
	4.3	Sine-wave voltage-tolerance	
	4.4	Overall pass-band selectivity	
	4.5	Bandwidth	19
	4.6	Frequency tuning-tolerance	20
	4.7	Intermediate frequency rejection ratio	20
	4.8	Image frequency rejection ratio	20
	4.9	Other spurious responses	20
	4.10	Limitation of intermodulation effects	21
	4.11	Limitations of receiver noise and internally-generated spurious signals	
	4.11.		
	4.11.		
	4.12	Limitation of radio-frequency emissions from the measuring receiver	
	4.12.		
	4.12.		
	4.13	Facilities for connection to a discontinuous disturbance analyzer	
5	Quas	i-peak measuring receivers for the frequency range 9 kHz to 1 000 MHz	
	5.1	General	
	5.2	Response to pulses	
	5.2.1	,	
	5.2.2	· · · · · · · · · · · · · · · · · · ·	
6	Meas	suring receivers with peak detector for the frequency range 9 kHz to 18 GHz	
	6.1	General	
	6.2	Charge and discharge time constants ratio	
	6.3	Overload factor	
_	6.4	Response to pulses	28
7		suring receivers with average detector for the frequency range 9 kHz to Hz	28
	7.1	General	
	7.1	Overload factor	
	7.3	Response to pulses	
	7.3.1	·	
	7.3.2	·	
	7.3.3	, ,	
8	Meas	suring receivers with RMS-average detector for the frequency range 9 kHz to	
-	18 GHz		32
	8.1	General	32
	8.2	Overload factor	32

8	3.3	Response to pulses	32
	8.3.1	Construction details	32
	8.3.2	Amplitude relationship	33
	8.3.3	Variation with repetition frequency	33
	8.3.4	Response to intermittent, unsteady and drifting narrowband disturbances	34
9		suring receivers for the frequency range 1 GHz to 18 GHz with amplitude ability distribution (APD) measuring function	34
10		ontinuous disturbance analyzers	
	10.1	General	
	10.1	Fundamental characteristics	
	10.2	Test method for the validation of the performance check for the click	00
	10.5	analyzer	43
	10.3.		
	10.3.	·	
	iex A (normative) Determination of response to repeated pulses of quasi-peak and age measuring receivers (see 3.6, 5.2.2, 8.2 and 8.3)	
	A.1	General	
	A.2	Response of the pre-detector stages	
-	4.3	Response of the quasi-peak detector to the output of preceding stages	
•	A.3.1		
	A.3.2		
A	A.4	Response of the RMS detector to the output voltage of preceding stages	
	A.4.1		
	A.4.2	·	
A	۹.5	Relationship between the indication of the RMS meter and the quasi-peak meter	
Ann	ex B (normative) Determination of pulse generator spectrum (See 5.2, 6.4, 7.2, 8.3)	
	3.1	Pulse generator	
_	B.1.1	· ·	
	B.1.2		
Е		General method of measurement	
Ann	ex C ((normative) Accurate measurements of the output of nanosecond pulse s (see 5.2, 6.4, 7.2, 8.3)	
•	C.1	Measurement of impulse area (A_{imp})	
	C.1.1		54
	C.1.2		
	C.1.3		
	C.1.4	Harmonic measurement	55
	C.1.5	5 Energy method	55
(0.2	Pulse generator spectrum	
		(normative) Influence of the quasi-peak measuring receiver characteristics se response (see 5.2.2)	
	•	normative) Response of average and peak measuring receivers (see 4.5)	
	Ξ.1	Response of pre-detector stages	
	=. 1 =.2	Overload factor	
	Ξ.3	Relationship between the indication of an average and a quasi-peak measuring receiver	
	= 1	Peak measuring receivers	5C

E.5	Relationship between indication of a peak and a quasi-peak measuring receiver	59
E.6	Test of measuring receiver response above 1 GHz to pulses	
E.7	Measurement of the impulse bandwidth of a measuring receiver	
E.7.1		
E.7.2	Method 1: Measurement by comparison of the responses of B_{imp} to two pulses with identical amplitude and width with low and high pulse repetition frequencies (PRF)	62
E.7.3	Method 2: Measurement by comparison of the response of B_{imp} to an impulsive signal with the response of a narrow bandwidth to the same	
E.7.4	signal Method 3: Integration of the normalized linear selectivity function	
Annex F (normative) Performance check of the exceptions from the definitions of a rding to 5.4.3 of CISPR 14–1:2016	
	(informative) Rationale for the specifications of the APD measuring function	
	informative) Characteristics of a quasi-peak measuring receiver	
	nformative) Example of EMI receiver and swept spectrum analyzer	
	re	77
	normative) Requirements when using an external preamplifier with a greceiver	79
J.1	General	79
J.2	Considerations for optimum emission measurement system design	79
J.3	Linearity specifications and precautions in measurement	82
J.4	Detecting the overload of an external preamplifier in a wideband FFT-based measuring system	89
Annex K (normative) Calibration requirements for measuring receivers	90
K.1	General	90
K.2	Calibration and verification	
K.3	Calibration and verification specifics	
K.4	Measuring receiver specifics	
K.4.1		
K.4.2	1	
K.5	Partial calibration of measuring receivers	92
K.6	Determination of compliance of a measuring receiver with applicable specifications	93
Annex L (normative) Verification of the RF pulse amplitude (See 7.3.1, 8.3.2)	
,	ohy	
g		
Figure 1 -	- Limits of overall selectivity – Pass-band (Band A)	18
-	- Limits of overall selectivity – Pass-band (Band B)	
•	- Limits of overall selectivity – Pass-band (Bands C and D)	
-	- Limits for the overall selectivity – Pass-band (Band E)	
_		
_	- Arrangement for testing intermodulation effects	
•	- Pulse response curve (Band A)	
-	- Pulse response curve (Band B)	
•	- Pulse response curve (Bands C and D)	25
	- Theoretical pulse response curve of quasi-peak detector receivers and letector receiver	26
Figure 10	- Block diagram of an average detector	31

Figure 11 – Screenshot showing the response of the meter-simulating network to an intermittent narrowband signal	21
Figure 12 – Example of a disturbance analyzer	
Figure 13 – Example of a disturbance analyzer	30
the performance checks against the definition of a click according to Table 14	39
Figure E.1 – Correction factor for estimating the ratio B_{imp}/B_6 for other tuned circuits	58
Figure E.2 – Pulse rectification coefficient P	60
Figure E.3 – Example (spectrum screenshot) of a pulse-modulated signal with a pulse width of 200 ns	61
Figure E.4 – Pulse-modulated RF signal applied to a measuring receiver	63
Figure E.5 – Filtering with a B _{imp} much smaller than the PRF	63
Figure E.6 – Filtering with a B_{imp} much wider than the PRF	
Figure E.7 – Calculation of the impulse bandwidth	64
Figure E.8 – Example of a normalized linear selectivity function	65
Figure F.1 – Graphical presentation of the test signals used for the performance checks of the analyzer with the additional requirements according to Table F.1	72
Figure G.1 – Block diagram of APD measurement circuit without A/D converter	74
Figure G.2 – Block diagram of APD measurement circuit with A/D converter	74
Figure G.3 – Example of display of APD measurement results versus equipment-under-test (EUT) state	75
Figure I.1 – Example of block diagram of an EMI receiver consisting of a swept spectrum analyzer with added preselector, preamplifier and quasi-peak/average detector	77
Figure J.1 – Receiver with preamplifier	
Figure J.2 – Example of the transfer function of an amplifier	83
Figure J.3 – Response of the amplifier of Figure J.2 for a sinusoidal signal	83
Figure J.4 – Response of the amplifier of Figure J.2 for an impulse	83
Figure J.5 – Deviation from linear gain for an unmodulated sine-wave (example)	84
Figure J.6 – Deviation from linear gain for a broadband impulsive signal as measured with the quasi-peak detector (example)	85
Figure J.7 – Screenshot of a band-stop filter test for a preamplifier at around 818 MHz	
Figure J.8 – Band-stop filter test result with the measuring receiver at 818 MHz	86
Figure J.9 – Band-stop filter test results for the same 10 dB preamplifier but a different receiver with preselection (black) and without preselection (blue)	87
Figure J.10 – Band-stop filter test results for the same 10 dB preamplifier but with the receiver of Figure J.9 with preselection (black) and without preselection (green)	87
Figure J.11 – Weighting functions of the various CISPR detectors with a noise curve to illustrate the remaining operating ranges for broadband impulsive signals (example)	88
Figure K.1 – Compliance determination process with application of measurement uncertainty	93
Table 1 – VSWR requirements for receiver input impedance	17
Table 2 – Combined selectivity of CISPR measuring receiver and high-pass filter	17
Table 3 – Bandwidth requirements for measuring receivers	20
Table 4 – Bandwidth characteristics for intermodulation test of quasi-peak measuring receivers	21
Table 5 – Test pulse characteristics for quasi-peak measuring receivers	23

Table 6 – Pulse response of quasi-peak measuring receivers	27
Table 7 – Relative pulse response of peak and quasi-peak measuring receivers for the same bandwidth (frequency range 9 kHz to 1 000 MHz)	28
Table 8 – Specification of pulse-modulated carrier (e.m.f.)	30
Table 9 – Maximum reading of average measuring receivers for a pulse-modulated sine-wave input in comparison with the response to a continuous sine-wave having the same amplitude	31
Table 10 – Minimum pulse repetition rate without overload	32
Table 11 – Specification of pulse-modulated carrier (e.m.f.) for testing RMS-average detectors	33
Table 12 – Pulse response of the RMS-average measuring receiver	34
Table 13 – Maximum reading of RMS-average measuring receivers for a pulse-modulated sine-wave input in comparison with the response to a continuous sine-wave having the same amplitude	34
Table 14 – Disturbance analyzer performance test – Test signals used for the check against the definition of a click	40
Table E.1 – B_{imp} and A_{imp} values for a peak measuring receiver	60
Table E.2 – Carrier level for pulse-modulated signal of 1,4 nVs	
Table F.1 – Disturbance analyzer test signals	67
Table H.1 – Characteristics of quasi-peak measuring receivers	76
Table J.1 – Examples of preamplifier and measuring receiver data and resulting system noise figures	82
Table K.1 – Verification parameter summary	92

INTERNATIONAL ELECTROTECHNICAL COMMISSION INTERNATIONAL SPECIAL COMMITTEE ON RADIO INTERFERENCE

SPECIFICATION FOR RADIO DISTURBANCE AND IMMUNITY MEASURING APPARATUS AND METHODS –

Part 1-1: Radio disturbance and immunity measuring apparatus – Measuring apparatus

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard CISPR 16-1-1 has been prepared by CISPR subcommittee A: Radio-interference measurements and statistical methods.

This fifth edition cancels and replaces the fourth edition published in 2015. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

a) Reorganization of the document structure to remove common elements of receiver performance from Clauses 4, 5, 6, and 7 and create a new clause that applies across all of these clauses. Key common parameters include:

- 1) Input impedance
- 2) CW amplitude accuracy
- 3) Limitations of intermodulation effects
- 4) Limitation of receiver noise and internally generated spurious signals
- b) Rewording of Subclause B.1.1 for the purpose of correcting existing errors
- c) Amendments to Subclause 7.5.2 to modify the definition of the test signal to be used for calibrating and verifying the required RMS-average detector response to pulses of the receiver. This section will include a note requiring that the amplitude of the pulsed signal be verified prior to the calibration, and will include several verification methods.
- d) Amendments to Subclause 6.5.2 to modify the definition of the test signal to be used for calibrating and verifying the required average detector response to pulses. The purpose of this proposed change is the alignment of the test signal type with that of the newly proposed signal used to verify the RMS-average detector, allowing the use of a pulsed RF signal. This section will include a note requiring that the amplitude of the pulsed signal be verified prior to the calibration and will include several verification methods.
- e) Implementation and use of Gaussian filters
- f) Amendments to Clause 9 on discontinuous disturbance analyzers (DDAs) to allow the use of measuring receivers with built-in DDAs, to clarify which signal is used for click time parameter determination and to allow the use of FFT-based measuring instruments with internal DDAs.
- g) Amendments to Subclauses 4.2, 5.2, 6.2 and 7.2 to remove the mention of a symmetric input for measuring receivers.
- h) Deletion of Subclause 4.8.1 "Screening Effectiveness".
- i) add a frequency accuracy specification to the proposed reorganized clause mentioned in a) above.
- j) Amend Subclause 6.5.3 to adjust the allowable tolerance for the variation with repetition frequency for the linear average detector.
- k) Add interpretation information to Clause K.4 based on CISPR-A-1188-INF.
- I) Indicate that the 31,6 Hz pulse repetition frequency for the RMS-Average test requirement for Bands C and D in Table 15 is optional. For the RMS-Average overload requirement in Table 13, change the minimum pulse repetition frequency to 100 Hz and the associated Peak to RMS-Average ratio to 30,6 dB.
- m) Improve the phrasing used for the tolerance statements in Subclauses 4.4.1, 5.5, 6.5.2, 6.5.3, 6.5.4 and 7.5.2.
- n) Remove a note from Clause E1.
- o) Add a reference for FFT-based discontinuous disturbance analyzers

It has the status of a basic EMC publication in accordance with IEC Guide 107, Electromagnetic compatibility – Guide to the drafting of electromagnetic compatibility publications.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
CIS/A/1290/FDIS	CIS/A/1295/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the CISPR 16 series, published under the general title *Specification for radio disturbance and immunity measuring apparatus and methods*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

The CISPR 16 series, published under the general title *Specification for radio disturbance and immunity measuring apparatus and methods*, is comprised of the following sets of documents:

- CISPR 16-1 six parts covering measurement instrumentation specifications;
- CISPR 16-2 five parts covering methods of measurement;
- CISPR TR 16-3 a single publication containing various technical reports (TRs) with further information and background on CISPR and radio disturbances in general;
- CISPR 16-4 five parts covering uncertainties, statistics and limit modelling.

CISPR 16-1 consists of the following parts, under the general title Specification for radio disturbance and immunity measuring apparatus and methods – Radio disturbance and immunity measuring apparatus:

- Part 1-1: Measuring apparatus
- Part 1-2: Coupling devices for conducted disturbance measurements
- Part 1-3: Ancillary equipment Disturbance power
- Part 1-4: Antennas and test sites for radiated disturbance measurements
- Part 1-5: Antenna calibration sites and reference test sites for 5 MHz to 18 GHz
- Part 1-6: EMC antenna calibration

The International Electrotechnical Commission (IEC) draws attention to the fact that it is claimed that compliance with this document may involve the use of a patent concerning the measuring receiver with RMS-average detector (patent no DE 10126830) given in Clause 7.

IEC takes no position concerning the evidence, validity and scope of this patent right.

The holder of this patent right has assured the IEC that he/she is willing to negotiate licences either free of charge or under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with IEC. Information may be obtained from:

Rohde & Schwarz GmbH & Co. KG Muehldorfstrasse 15 81671 Muenchen Germany

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. IEC shall not be held responsible for identifying any or all such patent rights.

ISO (www.iso.org/patents) and IEC (http://patents.iec.ch) maintain on-line data bases of patents relevant to their standards. Users are encouraged to consult the data bases for the most up to date information concerning patents.

SPECIFICATION FOR RADIO DISTURBANCE AND IMMUNITY MEASURING APPARATUS AND METHODS –

Part 1-1: Radio disturbance and immunity measuring apparatus – Measuring apparatus

1 Scope

This part of CISPR 16 specifies the characteristics and performance of equipment for the measurement of radio disturbance in the frequency range 9 kHz to 18 GHz. In addition, requirements are provided for specialized equipment for discontinuous disturbance measurements.

NOTE In accordance with IEC Guide 107, CISPR 16-1-1 is a basic electromagnetic compatibility (EMC) standard for use by product committees of the IEC. As stated in Guide 107, product committees are responsible for determining the applicability of a basic EMC standard. CISPR and its subcommittee are prepared to co-operate with product committees in the evaluation of the value of particular EMC tests for specific products.

The specifications in this document apply to electromagnetic interference (EMI) receivers and spectrum analyzers. The term "measuring receiver" used in this document refers to both EMI receivers and spectrum analyzers (see also 3.7). The calibration requirements for measuring receivers are detailed in Annex J.

Further guidance on the use of spectrum analyzers can be found in Annex B of any one of the following documents: CISPR 16-2-1:2014, CISPR 16-2-2:2010, or CISPR 16-2-3:-2016.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

CISPR 11:2015, Industrial, scientific and medical equipment - Radio-frequency disturbance characteristics - Limits and methods of measurement

CISPR 11:2015/AMD1:2016 CISPR 11:2015/AMD2:2019

CISPR 14-1:2016, Electromagnetic compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission

CISPR 16-2-1:2014, Specification for radio disturbance and immunity measuring apparatus and methods - Part 2-1: Methods of measurement of disturbances and immunity - Conducted disturbance measurements

CISPR 16-2-1:2014/AMD1:2017

CISPR 16-2-2:2010, Specification for radio disturbance and immunity measuring apparatus and methods - Part 2-2: Methods of measurement of disturbances and immunity - Measurement of disturbance power

CISPR 16-2-3:2016, Specification for radio disturbance and immunity measuring apparatus and methods - Part 2-3: Methods of measurement of disturbances and immunity - Radiated disturbance measurements