


**Terrestrial Trunked Radio (TETRA);
Voice plus Data (V+D);
Designers' guide;
Part 3: Direct Mode Operation (DMO)**

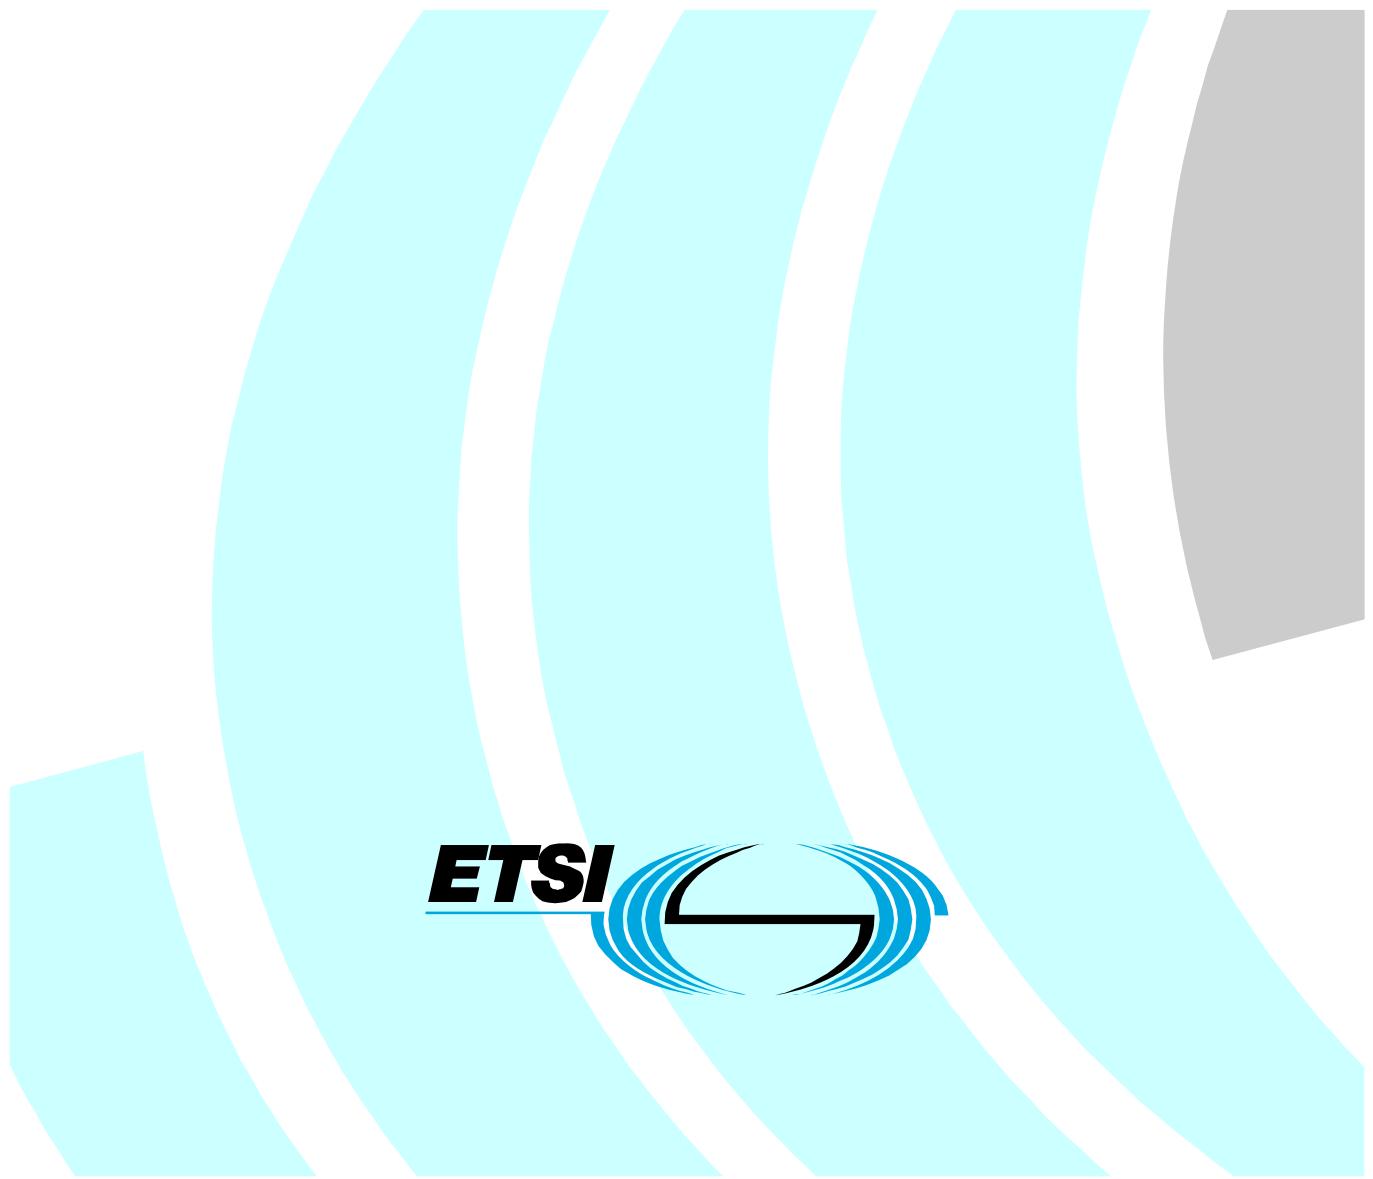

Reference

RTR/TETRA-01187-3

Keywords

MS, radio, TETRA

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:
<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.
Information on the current status of this and other ETSI documents is available at
<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:
http://portal.etsi.org/chaircor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2009.
All rights reserved.

DECT™, PLUGTESTS™, UMTS™, TIPHON™, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

LTE™ is a Trade Mark of ETSI currently being registered
for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Content

Intellectual Property Rights	9
Foreword.....	9
1 Scope	10
2 References	10
2.1 Normative references	11
2.2 Informative references.....	11
3 Definitions, symbols and abbreviations	12
3.1 Definitions.....	12
3.2 Symbols.....	14
3.3 Abbreviations	15
4 What is direct mode and why do we need it?.....	16
4.1 General	16
4.2 Frequency of operation.....	17
4.3 Managed Direct Mode.....	18
5 Direct mode services and facilities.....	19
5.1 Service definitions.....	19
5.1.1 Teleservice.....	19
5.1.2 Bearer service	19
5.1.3 Intrinsic service.....	19
5.1.4 Summary of tele/bearer services offered in TETRA DMO	20
5.1.5 Service Access	20
5.2 Direct mode teleservices	21
5.2.1 Individual call	21
5.2.2 Group call	21
5.2.3 SDS based teleservices	21
5.3 Direct mode bearer services	21
5.3.1 Circuit mode unprotected bearer services	22
5.3.2 Circuit mode protected bearer services	22
5.3.3 Short Data Service (SDS)	22
5.3.4 SDS-TL service	23
5.4 Intrinsic services.....	23
5.4.1 DM late entry.....	23
5.4.2 Transmitting party identification	24
5.4.3 Emergency calls.....	24
6 Description of direct mode equipment types.....	24
6.1 General	24
6.2 Direct mode mobile station (DM-MS)	25
6.3 Dual watch mobile station (DW-MS).....	26
6.4 Direct mode repeater (DM-REP).....	27
6.5 Direct mode gateway (DM-GATE).....	27
6.6 Direct mode repeater/gateway combination (DM-REP/GATE).....	28
6.7 Direct mode power classes	28
6.8 Limitations imposed by the physical layer for direct mode type equipment	29
7 Direct mode operational examples	29
7.1 General	29
7.2 MS to MS communication with full Dual Watching	30
7.3 DMO communication via a repeater with full Dual Watching.....	31
7.4 Gateway operation.....	31
7.5 Direct mode repeater/gateway operation	33
8 Outline of direct mode protocols.....	34
8.1 OSI reference model.....	34
8.2 TDMA frame and slot structure for direct mode operation.....	34

8.2.1	Frame structure	35
8.2.2	Timeslots and bursts	35
8.3	Physical layer functionality	36
8.4	Single call protocols	37
8.4.1	MS-MS Normal Mode	37
8.4.2	Repeater type 1A	37
8.4.3	Repeater type 1B	38
8.4.4	Gateway	38
8.4.5	Repeater/Gateway types 1A and 1B	38
8.5	Two call protocols	39
8.5.1	MS-MS frequency efficient mode	39
8.5.2	Repeater type 2	40
8.6	Choosing the repeater type	40
8.6.1	Background	40
8.6.2	Mobile trunked mode base station	40
8.6.2.1	Advantages of using a stand-alone mobile trunked mode base station for repeater operation	41
8.6.2.2	Disadvantages of using a stand-alone mobile trunked mode base station for repeater operation	41
8.7	Co-existence with trunked mode	41
8.7.1	General	41
8.7.2	Type 1A DM-REP in TM-BS transmit band	42
8.7.3	Type 1A DM-REP in TM-BS receive band	43
8.7.4	Type 1B or type 2 DM-REP transmitter in TM-BS transmit band	44
8.7.5	Type 1B or type 2 DM-REP transmitter in TM-BS receive band	45
8.7.6	DM-REP and DM-MSs far from TM-BS and TM-MSs	46
8.7.7	DM-REP and DM-MSs far from TM-BS, close to TM-MSs	46
8.7.8	DM-REP and DM-MSs close to TM-BS, far from TM-MSs	47
8.7.9	DM-REP and DM-MSs close to TM-BS and TM-MSs	47
8.8	Co-existence with direct mode MS-MS operation	48
8.8.1	General	48
8.8.2	MS-MS call in type 1B DM-REP uplink band	48
8.8.3	MS-MS call in type 1B DM-REP downlink band	49
8.9	Direct mode frequency re-use	50
8.9.1	General	50
8.9.2	MS-MS call on type 1B DM-REP uplink frequency	51
8.9.3	MS-MS call on type 1B DM-REP downlink frequency	52
8.10	Implementation and operation issues affecting dual watch	53
8.10.1	General	53
8.10.2	Basis for dual watch operation	53
8.10.3	Implementation of dual watch operation	53
8.10.3.1	Switching from idle to active	54
8.10.3.2	Switching from active to active	55
8.11	Channel surveillance	56
8.12	Battery economy	56
8.13	Testable boundaries	56
9	Security features	57
9.1	General	57
9.2	Authentication	57
9.2.1	Mobile to mobile operation	57
9.2.2	Dual Watch Operation	57
9.2.3	Gateway mode operation	57
9.3	Confidentiality	57
9.3.1	Air Interface (AI) encryption	57
9.3.1.1	Cipher Key	58
9.3.1.2	The Time Variant Parameter (TVP)	59
9.3.2	End-to-end encryption	59
9.4	Key Management	59
9.4.1	Air Interface Encryption keys	59
9.4.2	End to End Encryption keys	59
10	Radio Aspects	59
10.1	DMO deployment constraints	59

10.2	Transmitter noise.....	60
10.3	Blocking	61
10.4	Effects of transmitter noise and blocking.....	62
10.5	Methodology	62
10.5.1	Assumptions	63
10.5.2	Calculating the effect of transmitter noise	63
10.5.3	Calculating the effect of blocking.....	64
10.5.4	Allowing for a noise floor uplift	64
10.5.5	Translating path losses into distances	64
10.6	Example 1 - wanted signal at extremity of range, unwanted interferer close by.....	65
10.6.1	Step 1 - Calculate allowable noise	65
10.6.2	Step 2 - Translate allowable noise into path loss and stay-away distance	66
10.6.3	Step 3 - Calculate path loss and stay-away distance for blocking.....	66
10.7	Example 2 - wanted signal at close range, unwanted interferer close by	66
10.7.1	Step 1 - Calculate noise floor uplift	66
10.7.2	Step 2 - Calculate allowable noise	67
10.7.3	Step 3 - Translate allowable noise into path loss and stay-away distance	67
10.7.4	Step 4 - Calculate path loss and stay-away distance for blocking.....	67
10.8	Unwanted transmission noise versus blocking	67
10.9	Variation of stay-away distance with transmitter power and frequency separation	68
10.10	Effect of assumptions	69
10.11	Implementation issues	70
10.12	Recommended frequency separation for DMO MS-MSs.....	73
11	Operational scenarios	73
11.1	Range extension scenario using type 1A repeater	73
11.2	Range extension scenarios using a gateway	75
11.3	DMO range extension scenario with link into TMO Dispatcher using a type 1B repeater/gateway	76
11.4	DMO range extension scenario with link into TMO Dispatcher using a gateway	78
11.5	Range extension inside buildings using a type 2 repeater	79
Annex A:	Teleservices, bearer and supplementary services supported by TMO/DMO.....	81
Annex B:	Short range propagation models used in the co-existence studies.....	82
B.1	Introduction	82
B.2	Free space propagation.....	82
B.3	Bacon model.....	83
B.4	CEPT SE21 model	84
B.5	Discussion	86
Annex C:	Trial results for short range propagation model and comparison between theoretical and measured stay-away distances.....	89
C.1	Introduction	89
C.2	Results of the trials	89
C.3	Assumptions of the theoretical calculations	90
C.4	Propagation model.....	92
C.5	Losses between receiver and transmitters	92
C.6	Reduction in voice quality.....	94
C.7	Measured transmitter losses at the Newbury Racecourse trials and the decreased margin.....	95
C.8	The assumption of linearity	96
C.9	Conclusions and discussion.....	98
C.10	Quantitative assessment	99

Annex D:	RF channel selection, numbering and addressing.....	100
D.1	Background	100
D.2	Numbering.....	100
D.3	Addressing in repeater and gateway direct mode operation.....	101
D.4	Summary	101
Annex E:	Detailed direct mode protocols	102
E.1	General	102
E.2	MS-MS direct mode normal operation.....	102
E.2.1	DM protocol layering	102
E.2.2	MS-MS direct mode functionality.....	103
E.2.3	MS-MS physical resources.....	103
E.2.4	Slot timing diagrams	103
E.2.4.1	Constraints on the frame structure (including synchronization)	104
E.2.4.2	Direct mode operation	104
E.2.5	MS-MS call set-up protocol	105
E.2.5.1	MS-MS call set-up without presence check.....	105
E.2.5.2	MS-MS call set-up time (fundamental constraints)	106
E.2.5.3	MS-MS call set-up with presence check.....	106
E.2.6	Late entry.....	106
E.2.7	Channel reservation and changeover in a call	107
E.2.8	Pre-emption of a DM call.....	108
E.2.9	Terminating a call.....	109
E.2.10	DM short data call	109
E.2.10.1	Unacknowledged short data message	109
E.2.10.2	Acknowledged short data message	109
E.2.11	Implementation issues	110
E.2.11.1	Configuration.....	110
E.2.11.2	Calling/dialling procedures.....	110
E.3	Repeater Type 1A.....	111
E.3.1	DM protocol layering	111
E.3.2	Direct mode functionality.....	111
E.3.3	Physical resources	111
E.3.4	Slot timing diagrams	111
E.3.4.1	Constraints on the frame structure (including synchronization)	111
E.3.4.2	Direct mode operation	111
E.3.5	Call set-up protocol	112
E.3.5.1	Call set-up without presence check.....	112
E.3.5.2	Call set-up time (fundamental constraints)	113
E.3.5.3	Call set-up with presence check.....	113
E.3.6	Late entry.....	114
E.3.7	Channel reservation and changeover in a call	114
E.3.8	Pre-emption of a DM call.....	115
E.3.9	Terminating a call.....	116
E.3.10	DM short data call	116
E.3.10.1	Unacknowledged short data message	116
E.3.10.2	Acknowledged short data message	117
E.3.11	Implementation Issues	118
E.3.11.1	Configuration.....	118
E.3.11.2	Calling/dialling procedures.....	119
E.3.11.3	Operational procedures.....	119
E.3.11.4	Constraints	119
E.4	Repeater Type 1B.....	120
E.4.1	DM protocol layering	120
E.4.2	Direct mode functionality.....	120
E.4.3	Physical resources	120
E.4.4	Slot timing diagrams	120

E.4.4.1	Constraints on the frame structure (including synchronization)	120
E.4.4.2	Direct mode operation	120
E.4.5	Call set-up protocol	120
E.4.5.1	Call set-up without presence check.....	120
E.4.5.2	Call set-up time (fundamental constraints)	120
E.4.5.3	Call set-up with presence check.....	121
E.4.6	Late entry.....	121
E.4.7	Channel reservation and changeover in a call	121
E.4.8	Pre-emption of a DM call	121
E.4.9	Terminating a call.....	121
E.4.10	DM short data call	121
E.4.10.1	Unacknowledged short data message	121
E.4.10.2	Acknowledged short data message	121
E.4.11	Implementation Issues	121
E.4.11.1	Configuration.....	121
E.4.11.2	Calling/dialling procedures.....	121
E.4.11.3	Operational procedures.....	121
E.4.11.4	Constraints	121
E.5	Gateway.....	122
E.5.1	DM protocol layering	122
E.5.2	Direct mode functionality.....	122
E.5.3	Physical resources	122
E.5.4	Slot timing diagrams	122
E.5.4.1	Constraints on the frame structure (including synchronization)	124
E.5.4.2	Direct mode operation	124
E.5.5	Call set-up protocol	124
E.5.5.1	Group call from V+D to DM-MS via a DM-GATE	124
E.5.5.2	Group call from DM-MS via a DM-GATE	126
E.5.5.3	Call set-up time (fundamental constraints)	128
E.5.5.4	Individual call from V+D MS to DM-MS via a DM-GATE	129
E.5.5.5	Individual call from DM-MS to V+D MS via a DM-GATE	131
E.5.6	Late entry.....	132
E.5.7	Channel reservation and changeover in a call	132
E.5.8	Pre-emption of a DM call	134
E.5.9	Terminating a DM-GATE call	136
E.5.10	DM short data call	136
E.5.11	Implementation Issues	137
E.5.11.1	Configuration.....	137
E.5.11.2	Calling/dialling procedures.....	137
E.5.11.3	Operational procedures.....	138
E.5.11.4	Constraints	138
E.6	Repeater/Gateway Type 1A	138
E.6.1	DM protocol layering	138
E.6.2	Direct mode functionality.....	138
E.6.3	Physical resources	139
E.6.4	Slot timing diagrams	139
E.6.4.1	Constraints on the frame structure (including synchronization)	139
E.6.4.2	Direct mode operation	139
E.6.5	Group call from DM-MS via DM-REP/GATE	139
E.6.6	Implementation Issues	140
E.6.6.1	Configuration.....	140
E.6.6.2	Calling/dialling procedures.....	141
E.6.6.3	Operational procedures.....	142
E.6.6.4	Constraints	142
E.7	Repeater/Gateway Type 1B.....	142
E.7.1	DM protocol layering	142
E.7.2	Direct mode functionality.....	142
E.7.3	Physical resources	142
E.7.4	Implementation Issues	142
E.7.4.1	Configuration.....	142

E.7.4.2	Calling/dialling procedures	143
E.7.4.3	Operational procedures	143
E.7.4.4	Constraints	143
E.8	MS-MS frequency efficient operation	143
E.8.1	DM protocol layering	143
E.8.2	Direct mode functionality	143
E.8.3	Physical resources	143
E.8.4	Slot timing diagrams	143
E.8.4.1	Constraints on the frame structure (including synchronization)	143
E.8.4.2	Direct mode operation	143
E.8.5	Call set-up protocol	144
E.8.5.1	Call set-up without presence check	144
E.8.5.2	Call set-up time (fundamental constraints)	144
E.8.5.3	Call set-up with presence check	144
E.8.6	Late entry	144
E.8.7	Channel reservation and changeover in a call	145
E.8.8	Pre-emption of a DM call	145
E.8.9	Terminating a call	145
E.8.10	DM short data call	145
E.8.10.1	Unacknowledged short data message	145
E.8.10.2	Acknowledged short data message	145
E.8.11	Implementation Issues	145
E.8.11.1	Configuration	145
E.8.11.2	Calling/dialling procedures	145
E.9	Repeater Type 2	145
E.9.1	DM protocol layering	145
E.9.2	Direct mode functionality	145
E.9.3	Physical resources	146
E.9.4	Slot timing diagrams	146
E.9.4.1	Constraints on the frame structure (including synchronization)	146
E.9.4.2	Direct mode operation	146
E.9.5	Call set-up protocol	146
E.9.5.1	Call set-up without presence check	147
E.9.5.2	Call set-up time (fundamental constraints)	148
E.9.5.3	Call set-up with presence check	148
E.9.6	Late entry	149
E.9.7	Channel reservation and changeover in a call	149
E.9.8	Pre-emption of a DM call	150
E.9.9	Terminating a call	151
E.9.10	DM short data call	151
E.9.10.1	Unacknowledged short data message	151
E.9.10.2	Acknowledged short data message	152
E.9.11	Implementation Issues	153
E.9.11.1	Configuration	153
E.9.11.2	Calling/dialling procedures	153
E.9.11.3	Operational procedures	153
E.9.11.4	Constraints	153
Annex F:	Support of security features	154
F.1	Time Variant Parameter	154
F.2	Synchronization of end-to-end encryption	154
History	155