

AMERICAN NATIONAL STANDARD

# Metric Hex Bolts

---

**ANSI B18.2.3.5M - 1979**

**REAFFIRMED 1995**

FOR CURRENT COMMITTEE PERSONNEL  
PLEASE SEE ASME MANUAL AS-11

**Government Key Words:  
Bolt, Hex—Metric**

***SECRETARIAT***

SOCIETY OF AUTOMOTIVE ENGINEERS  
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS

***PUBLISHED BY***

**THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS**

**United Engineering Center      345 East 47th Street      New York, N. Y. 10017**

## ACCEPTANCE NOTICE

This non-Government document was adopted on 26 April 1979 and is approved for use by the DoD and Federal Agencies. Metric hex bolts shall conform to this document and Appendix III, which establishes standard items for Government application. Appendix III, Table 4 shall be used for item selection in accordance with the part numbering system and size information contained therein. The indicated industry group has furnished the clearances required by existing regulations. Copies of the document are stocked by DoD Single Stock Point, Naval Publications and Forms Center, Philadelphia, PA, 19120, for issue to DoD activities and Federal Agencies only. Contractors and industry groups must obtain copies directly from:

The American Society of Mechanical Engineers  
United Engineering Center, 345 E. 47th Street  
New York, NY 10017 or

The American National Standards Institute  
1430 Broadway, New York, NY 10018

Title of Document: Bolt, Hex – Metric  
ANSI Document No.: ANSI B18.2.3.5M-1979  
Date of Specific Issue Adopted: 26 April 1979  
Releasing Industry Group: The American Society of Mechanical Engineers

Custodians: Military Coordinating Activity  
Army – AR  
Navy – AS  
Air Force – 99  
(Project 5306-0620)

Review Activities: User Activities:  
Army – AV, MI, ER  
Navy – MC  
DLA – IS  
NSA – NS  
Army – ME, AT  
Navy – SH

Civil Agencies:  
GSA-FSS

NOTICE: When reaffirmation, amendment, revision, or cancellation of this standard is initially proposed, the industry group responsible for this standard shall inform the Military Coordinating Activity of the proposed action and request their participation.

FSC 5306

---

No part of this document may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

Date of Issuance: August 31, 1979

Copyright ©1979 by  
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS  
All Rights Reserved  
Printed in U.S.A.

## ERRATA

to

### ANSI B18.2.3.5M-1979 METRIC HEX BOLTS

**Page 3, Note 18, change B1.13 to read B1.13M**

**Page 5, in the standard shall be replaced with the second page of this errata**

**Page 10, MATERIAL AND FINISH CODE, change to read:**

- A – Steel w/Cadmium Plating per QQ-P-416, Type II, Class 3 (5.1 $\mu$ m Plating Thickness), Property Class 10.9.
  
- B – Steel w/Zinc Plating per QQ-Z-325, Type II, Class 3 (5.1 $\mu$ m Plating Thickness), Property Class 10.9.

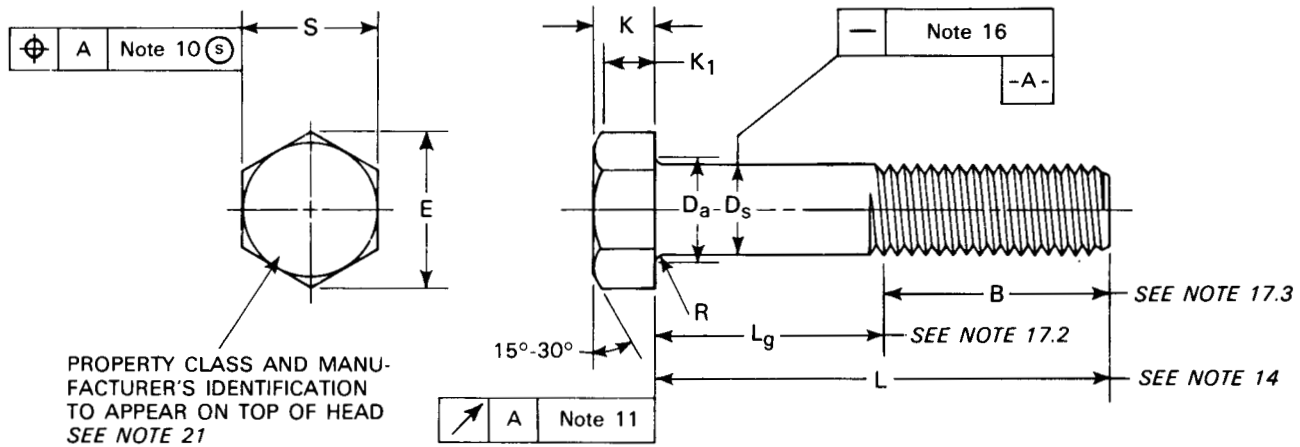


Table 1 Dimensions of Hex Bolts

D	Ds		S		E		K		K <sub>1</sub>	Da	R	B (Ref)		
	Body Diameter		Width Across Flats		Width Across Corners		Head Height		Wrenching Height	Fillet Transition Dia	Radius of Fillet	Thread Length (Basic)		
	Max	Min	Max	Min	Max	Min	Max	Min	Min	Max	Min	Bolt Lengths < 125	Bolt Lengths > 125 and < 200	Bolt Lengths > 200
M5 x 0.8	5.48	4.52	8.00	7.64	9.24	8.63	3.88	3.35	2.4	5.7	0.2	16	22	35
M6 x 1	6.19	5.52	10.00	9.64	11.55	10.89	4.38	3.85	2.8	6.8	0.3	18	24	37
M8 x 1.25	8.58	7.42	13.00	12.57	15.01	14.20	5.68	5.10	3.7	9.2	0.4	22	28	41
M10 x 1.5	10.58	9.42	16.00	15.57	18.48	17.59	6.85	6.17	4.5	11.2	0.4	26	32	45
M12 x 1.75	12.70	11.30	18.00	17.57	20.78	19.85	7.95	7.24	5.2	13.7	0.6	30	36	49
M14 x 2	14.70	13.30	21.00	20.16	24.25	22.78	9.25	8.51	6.2	15.7	0.6	34	40	53
M16 x 2	16.70	15.30	24.00	23.16	27.71	26.17	10.75	9.68	7.0	17.7	0.6	38	44	57
M20 x 2.5	20.84	19.16	30.00	29.16	34.64	32.95	13.40	12.12	8.8	22.4	0.8	46	52	65
M24 x 3	24.84	23.16	36.00	35.00	41.57	39.55	15.90	14.56	10.5	26.4	0.8	54	60	73
M30 x 3.5	30.84	29.16	46.00	45.00	53.12	50.55	19.75	17.92	13.1	33.4	1.0	66	72	85
M36 x 4	37.00	35.00	55.00	53.80	63.51	60.79	23.55	21.62	15.8	39.4	1.0	78	84	97
M42 x 4.5	43.00	41.00	65.00	62.90	75.06	71.71	27.05	25.03	18.2	45.4	1.2	90	96	109
M48 x 5	49.00	47.00	75.00	72.60	86.60	82.76	31.07	28.93	21.0	52.0	1.5	102	108	121
M56 x 5.5	57.20	54.80	85.00	82.20	98.15	93.71	36.20	33.80	24.5	62.0	2.0	—	124	137
M64 x 6	65.52	62.80	95.00	91.80	109.70	104.65	41.32	38.68	28.0	70.0	2.0	—	140	153
M72 x 6	73.84	70.80	105.00	101.40	121.24	115.60	46.45	43.55	31.5	78.0	2.0	—	156	169
M80 x 6	82.16	78.80	115.00	111.00	132.79	126.54	51.58	48.42	35.0	86.0	2.0	—	172	185
M90 x 6	92.48	88.60	130.00	125.50	150.11	143.07	57.74	54.26	39.2	96.0	2.0	—	192	205
M100 x 6	102.80	98.60	145.00	140.00	167.43	159.60	63.90	60.10	43.4	107.0	2.5	—	212	225
See Notes	12				6.9		7		8	13		17.3		
M10 x 1.5	10.58	9.42	15.00	14.57	17.32	16.46	6.85	6.17	4.5	11.2	0.4	26	32	45

\*See Note 2.2 of General Data.



**M0104E**

## FOREWORD

American National Standards Committee B18 for the standardization of bolts, screws, nuts, rivets and similar fasteners was organized in March 1922, as Sectional Committee B18 under the aegis of the American Engineering Standards Committee (later the American Standards Association, then the United States of American Standards Institute and, as of October 6, 1969, the American National Standards Institute, Inc.), with the Society of Automotive Engineers and the American Society of Mechanical Engineers as joint sponsors. Subcommittee 2 was subsequently established and charged with the responsibility for technical content of standards covering wrench head bolts and nuts.

At its meeting on December 4, 1974, Committee B18 authorized preparation of a series of standards for metric fasteners. Subcommittee 2 was assigned responsibility for developing standards for metric hex bolts, screws and nuts.

At a meeting on September 22, 1976, Subcommittee 2 organized the contents of a standard covering eight different hex head screw and bolt products. Actual drafting was postponed until ISO/TC2 could reach final decisions relating to basic dimensions and characteristics of hex bolts, screws and nuts. At ISO/TC2 meetings held in April 1977, final actions were taken. Committee B18 affirmed the TC2 decisions at a meeting on June 29, 1977 and drafting of this standard was started.

In February 1978, Committee B18 established a cooperative program with the Department of Defense to draft American National Standards for metric fasteners in such a way that they could be used directly by the Government for procurement purposes. The Department of Defense requested that each of the eight products be covered in separate standards, and Subcommittee 2 accepted this approach at its meeting on June 27, 1978.

This standard was approved by letter ballot of Committee B18 on September 15, 1978, and was subsequently approved by the secretariat and submitted to the American National Standards Institute for designation as an American National Standard. This was granted on April 26, 1979.

**AMERICAN NATIONAL STANDARDS COMMITTEE B18  
STANDARDIZATION OF BOLTS, NUTS, RIVETS, SCREWS,  
WASHERS AND SIMILAR FASTENERS**

**OFFICERS**

**R. P. Trowbridge, *Chairman***  
**J. B. Levy, *Vice-Chairman***  
**H. G. Muenchinger, *Vice-Chairman***  
**Richard McGinnis, *Secretary***

**COMMITTEE PERSONNEL**

**AMERICAN CHAIN ASSOCIATION**

*L. E. Hampel*, Moline Malleable Iron Company, St. Charles, Illinois

**AMERICAN HARDWARE MANUFACTURERS ASSOCIATION**

*Donald Wanek*, Wrought Washer Manufacturing Company, Milwaukee, Wisconsin

**AMERICAN INSTITUTE OF INDUSTRIAL ENGINEERS**

*R. T. Kelly*, Hitchcock Publishing Company, Wheaton, Illinois

**AMERICAN SOCIETY OF AGRICULTURAL ENGINEERS**

*E. R. Friesth*, Deere & Company, Moline, Illinois

**AMERICAN SOCIETY OF MECHANICAL ENGINEERS, THE**

*A. R. Machell, Jr.*, Xerox Corporation, Rochester, New York

*F. P. Tisch*, Desert Hot Springs, California

*R. P. Trowbridge*, GM Technical Center, Warren, Michigan

*C. R. Adams, Alternate*, Newport News Shipbuilding & Dry Dock Company, Newport News, Virginia

*K. E. McCullough, Alternate*, SPS Technologies, Jenkintown, Pennsylvania

**ANTI-FRICTION BEARING MANUFACTURERS ASSOCIATION**

*W. J. Derner*, FMC Corporation, Indianapolis, Indiana

**ENGINE MANUFACTURERS ASSOCIATION**

*K. F. Naylor*, Cummins Engine Company, Columbus, Indiana

**FARM & INDUSTRIAL EQUIPMENT INSTITUTE**

*E. R. Friesth*, Deere & Company, Moline, Illinois

**HAND TOOLS INSTITUTE**

*C. B. Ingersoll*, J. H. Williams Company, Buffalo, New York

**INDUSTRIAL FASTENERS INSTITUTE**

*R. B. Belford*, Industrial Fasteners Institute, Cleveland, Ohio

*A. R. Breed*, The Lamson & Sessions Company, Cleveland, Ohio

*D. A. Garrison*, Russell, Burdsall & Ward, Inc. Rock Falls, Illinois

*R. W. Groover*, Bethlehem Steel Company, Lebanon, Pennsylvania

*E. J. Heldman*, Holo-Krome Company, West Hartford, Connecticut

*Jack Shugart*, Rockford Products Corporation, Rockford, Illinois

*D. P. Wagner*, Illinois Tool Works, Inc., Elgin, Illinois

*D. D. Wheeler*, Armco Steel Corporation, Kansas City, Missouri

*N. W. Bellas, Alternate*, Illinois Tool Works, Inc., Elgin, Illinois

*R. M. Harris, Alternate*, Bethlehem Steel Corporation, Lebanon, Pennsylvania

*F. R. Ling, Alternate*, Russell, Burdsall & Ward, Inc., Mentor, Ohio

**METAL CUTTING TOOL INSTITUTE**

*D. J. Emanuelli*, Greenfield Tap & Die, Greenfield, Massachusetts

**NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION**

- J. B. Levy*, General Electric Company, Schenectady, New York
- F. F. Weingruber*, Westinghouse Electric Corporation, Pittsburgh, Pennsylvania
- F. K. Kitzantides*, *Alternate*, National Electrical Manufacturers Association, Washington, D.C.

**NATIONAL ELEVATOR INDUSTRY, INC.**

- R. J. Cummings*, Otis Elevator Company, Mahwah, New Jersey

**SOCIETY OF AUTOMOTIVE ENGINEERS**

- H. W. Ellison*, GM Corporation, Warren, Michigan
- S. E. Mallen*, Ford Motor Company, Dearborn, Michigan
- R. S. Piotrowski*, Mack Trucks, Inc., Allentown, Pennsylvania
- C. F. Schaening*, GM Engineering Standards Section, Warren, Michigan
- R. R. Sjoberg*, International Harvester Company, Hinsdale, Illinois
- D. W. Vial*, Chrysler Corporation, Detroit, Michigan

**SOCKET SCREW PRODUCTS BUREAU**

- E. R. Carter, Jr.*, The Allen Manufacturing Company, Hartford, Connecticut
- Jack Trilling*, Great Lakes Screw, Chicago, Illinois

**TELEPHONE GROUP**

- R. A. Agnew*, Western Electric Company, Chicago, Illinois
- R. Morse*, Bell Laboratories, Columbus, Ohio
- H. Haefeli*, *Alternate*, Bell Laboratories, Columbus, Ohio

**TUBULAR RIVET & MACHINE INSTITUTE**

- J. G. Zeratsky*, National Rivet & Manufacturing Company, Waupun, Wisconsin

**U.S. DEPARTMENT OF THE AIR FORCE**

- To be appointed

**U.S. DEPARTMENT OF THE ARMY**

- M. E. Taylor*, U.S. Army Armament R & D Command, Dover, New Jersey
- Allen Herskovitz*, *Alternate*, U.S. Army Armament R & D Command, Dover, New Jersey

**U.S. DEPARTMENT OF DEFENSE**

- Eli Schwartz*, Defense Industrial Supply Center, Philadelphia, Pennsylvania
- Lewis Pieninck*, *Alternate*, Defense Industrial Supply Center, Philadelphia, Pennsylvania

**U.S. DEPARTMENT OF THE NAVY**

- J. R. Ruff*, Department of the Navy, Washington, D.C.
- M. S. Orysh*, *Alternate*, Department of the Navy, Philadelphia, Pennsylvania

**U.S. MACHINE CAP WOOD & TAPPING SCREW BUREAUS**

- S. C. Adamek*, Pheoll Manufacturing Company, Chicago, Illinois
- R. M. Byrne*, U.S. Screw Service Bureau, New York, New York
- T. J. Ferry*, E.W. Ferry Screw Products Company, Inc., Cleveland, Ohio
- Casey Gordon*, Parker-Kalon, Campbellsville, Kentucky
- H. G. Muenchinger*, Continental Screw Company, New Bedford, Massachusetts
- K. D. Ringland*, Parker-Kalon, USM Corporation, Campbellsville, Kentucky
- R. H. Seymour*, Reed & Prince Manufacturing Company, Worcester, Massachusetts
- Louis Zanin*, Elco Industries, Inc., Rockford, Illinois
- Paul Foytho*, *Alternate*, Harvey Hubbel, Inc., Bridgeport, Connecticut

**INDIVIDUAL COMPANIES**

- D. N. Badgley*, Clark Equipment Company, Battle Creek, Michigan
- R. W. Bertoia*, The Ohio Nut & Washer Company, Mingo Junction, Ohio
- E. D. Cowlin*, Canton, Ohio
- J. E. Eaton, Jr.*, IBM Corporation, Boulder, Colorado
- J. F. Tornow*, Microdot Inc., Troy, Michigan

**INDIVIDUAL MEMBERS**

- C. O. Franklin*, Valley Bolt Company, Marion, Iowa
- F. E. Graves*, Fairfield, Connecticut



**PERSONNEL OF SUBCOMMITTEE NO. 2 –  
SQUARE AND HEX BOLTS AND NUTS**

*R. R. Sjoberg, Chairman*, International Harvester Company, Hinsdale, Illinois  
*R. B. Belford, Secretary*, Industrial Fasteners Institute, Cleveland, Ohio  
*S. C. Adamek*, Pheoll Manufacturing Company, Chicago, Illinois  
*D. N. Badgley*, Clark Equipment Company, Battle Creek, Michigan  
*A. G. Baustert*, Federal Screw Works, Detroit, Michigan  
*A. R. Breed*, The Lamson & Sessions Company, Cleveland, Ohio  
*R. M. Byrne*, U.S. Screw Service Bureau, New York, New York  
*Art Clever*, Deere & Company, Moline, Illinois  
*W. J. Derner*, FMC Corporation, Indianapolis, Indiana  
*D. A. Garrison*, Russell, Burdsall & Ward, Inc., Rock Falls, Illinois  
*F. E. Graves*, Fairfield, Connecticut  
*R. M. Harris*, Bethlehem Steel Corporation, Lebanon, Pennsylvania  
*J. B. Levy*, General Electric Company, Schenectady, New York  
*D. T. Lipari*, Bell Telephone Laboratories, Inc., Columbus, Ohio  
*A. R. Machell, Jr.*, Xerox Corporation, Rochester, New York  
*K. E. McCullough*, SPS Technologies, Jenkintown, Pennsylvania  
*J. C. McMurray*, Russell, Burdsall & Ward Inc., Mentor, Ohio  
*H. G. Muenchinger*, Continental Screw Company, New Bedford, Massachusetts  
*J. F. Nagy*, Ford Motor Company, Dearborn, Michigan  
*I. M. Park*, The Steel Company of Canada, Ltd., Hamilton, Ontario, Canada  
*C. F. Schaening*, General Motors Corporation, Warren, Michigan  
*Lou Strang*, Caterpillar Tractor Company, East Peoria, Illinois  
*M. E. Taylor*, U.S. Army Armament R & D Command, Dover, New Jersey  
*R. P. Trowbridge*, General Motors Corporation, Warren, Michigan  
*P. A. Vacca*, Defense Industrial Supply Center, Philadelphia, Pennsylvania  
*F. F. Weingruber*, Westinghouse Electric Corporation, Pittsburgh, Pennsylvania  
*D. D. Wheeler*, Armco Steel Corporation, Kansas City, Missouri  
*Tony Nebesney, Alternate*, FMC Corporation, Indianapolis, Indiana  
*L. Pieninck, Alternate*, Defense Industrial Supply Center, Philadelphia, Pennsylvania

## CONTENTS

	Page
<b>GENERAL DATA</b> .....	1
 <b>TABLES</b>	
1. Dimensions of Hex Bolts. ....	5
2. Dimensions of Reduced Body Diameter. ....	6
3. Length Tolerances. ....	6
 <b>APPENDIXES</b>	
Appendix I – Bolt Straightness, Referee Gage and Gaging Procedure .....	7
Appendix II – Recommended Clearance Holes for Bolts .....	8
Appendix III – Government Standard Items and Part Numbering System .....	9

## AMERICAN NATIONAL STANDARD

## METRIC HEX BOLTS

## GENERAL DATA

## 1. Scope

**1.1** This standard covers the complete general and dimensional data for metric hex bolts recognized as "American National Standard."

**1.2** The inclusion of dimensional data in this standard is not intended to imply that all of the sizes in conjunction with the various options described herein are stock production items. Consumers are requested to consult with manufacturers concerning lists of stock production hex bolts.

**1.3** Hex bolts purchased for Government use shall conform to this standard, and additionally to the requirements of Appendix III.

## 2. Comparison With ISO Standards

**2.1** Hex bolts as presented in this standard have been coordinated, to the extent possible, with ISO 4016. The dimensional differences between this ANSI standard and ISO 4016 are few, relatively minor, and none will affect the functional interchangeability of bolts manufactured to the requirements of either.

The following functional characteristics of hex bolts in sizes M5 thru M36 are in agreement between this ANSI standard and ISO 4016:

- Diameters and thread pitches (see 26)
- Body diameters
- Widths across flats (see 2.2)
- Head heights
- Thread lengths
- Thread dimensions
- Nominal lengths

**2.2** At its meeting in Varna, May 1977, ISO/TC2 studied several technical reports analyzing design

considerations influencing determination of the best series of width across flats for hexagon bolts, screws and nuts. A primary technical objective was to achieve a logical ratio between under head (nut) bearing surface area (which determines the magnitude of the compressive stress on the bolted members) and the tensile stress area of the screw thread (which governs the clamping force that can be developed by tightening the fastener.) Table 1 lists the sizes selected by ISO/TC2 to be ISO standard.

M10 bolts with 15 mm width across flats are currently being produced and used in U.S.A. and many other countries of the world. This size, however, is not an ISO standard. Unless M10 bolts with 15 mm width across flats are specifically ordered, M10 bolts with 16 mm width across flats shall be furnished.

**2.3** Letter symbols designating dimensional characteristics are used in accord with those used in ISO standards, except capitals have been used for data processing convenience instead of lower case letters used in ISO standards.

## 3. Dimensions

**3.1** All dimensions in this standard are in millimeters, unless stated otherwise.

**3.2** Symbols specifying geometric characteristics are in accord with American National Standard, Dimensioning and Tolerancing, ANSI Y14.5-1973.

**4. Availability.** Hex bolts in sizes M5 thru M24 are standard only in lengths longer than 150 mm or 10D, whichever is shorter. When shorter lengths of these sizes are ordered, hex cap screws, in conformance with ANSI B18.2.3.1M, are normally supplied. Hex bolts in sizes M30 and larger are standard in all lengths, however, at manufacturer's option, hex cap screws may be substituted for any diameter-length combination.