

ETSI TS 123 334 V14.4.0 (2018-01)



**Digital cellular telecommunications system (Phase 2+) (GSM);
Universal Mobile Telecommunications System (UMTS);
LTE;
IP Multimedia Subsystem (IMS)
Application Level Gateway (IMS-ALG)
- IMS Access Gateway (IMS-AGW) interface:
Procedures descriptions
(3GPP TS 23.334 version 14.4.0 Release 14)**



Reference

RTS/TSGC-0423334ve40

Keywords

GSM,LTE,UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:
<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.
Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:
<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.
The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2018.
All rights reserved.

DECT™, PLUGTESTS™, UMTS™ and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and
of the 3GPP Organizational Partners.

oneM2M logo is protected for the benefit of its Members.
GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under
<http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

| | |
|--|----|
| Intellectual Property Rights | 2 |
| Foreword..... | 2 |
| Modal verbs terminology..... | 2 |
| Foreword..... | 8 |
| 1 Scope | 9 |
| 2 References | 9 |
| 3 Definitions, symbols and abbreviations | 13 |
| 3.1 Definitions..... | 13 |
| 3.2 Symbols..... | 14 |
| 3.3 Abbreviations | 14 |
| 4 Architecture | 15 |
| 4.1 Reference architecture..... | 15 |
| 4.2 NAT Function | 16 |
| 4.3 ATCF/ATGW Function | 17 |
| 4.4 eP-CSCF/eIMS-AGW Function..... | 17 |
| 5 Functional Requirements..... | 18 |
| 5.1 General | 18 |
| 5.2 Gate Control & Local NAT | 18 |
| 5.3 IP realm indication and availability..... | 18 |
| 5.4 Remote NAT traversal support..... | 19 |
| 5.5 Remote Source Address/Port Filtering | 19 |
| 5.6 Traffic Policing | 19 |
| 5.7 Hanging Termination Detection | 20 |
| 5.8 QoS Packet Marking | 20 |
| 5.9 Handling of RTCP streams..... | 20 |
| 5.9.1 General..... | 20 |
| 5.9.2 RTP/RTCP transport multiplexing | 21 |
| 5.10 Media Inactivity Detection | 21 |
| 5.11 IMS Media Plane Security | 22 |
| 5.11.1 General..... | 22 |
| 5.11.2 End-to-access-edge Security | 22 |
| 5.11.2.1 End-to-access-edge security for RTP based media using SDES | 22 |
| 5.11.2.2 End-to-access-edge security for TCP based media using TLS | 23 |
| 5.11.2.2.1 General | 23 |
| 5.11.2.2.2 e2ae security for session based messaging (MSRP)..... | 24 |
| 5.11.2.2.3 e2ae security for conferencing (BFCP) | 25 |
| 5.11.2.3 End-to-access-edge security for UDP based media using DTLS | 25 |
| 5.11.2.3.1 General | 25 |
| 5.11.2.3.2 e2ae security for T.38 fax over UDP/UDPTL transport | 25 |
| 5.11.2.4 End-to-access-edge security for RTP based media using DTLS-SRTP | 26 |
| 5.11.2.5 End-to-access-edge security for RTP based voice and video media using DTLS-SRTP over TCP..... | 27 |
| 5.11.2.6 End-to-access-edge security for WebRTC data channels using UDP/DTLS/SCTP transport | 28 |
| 5.11.3 End-to-end Security | 28 |
| 5.11.3.1 End-to-end security for RTP based media | 28 |
| 5.11.3.2 End-to-end security for TCP-based media using TLS | 28 |
| 5.12 Explicit Congestion Notification support | 29 |
| 5.12.1 General..... | 29 |
| 5.12.2 Incoming SDP offer with ECN | 29 |
| 5.12.3 Incoming SDP offer without ECN | 29 |
| 5.12.4 Detection of ECN failures by IMS-AGW | 29 |
| 5.13 Transcoding | 30 |
| 5.13.1 General..... | 30 |
| 5.13.2 Handling of common codec parameters..... | 30 |

| | | |
|------------|--|----|
| 5.13.3 | Handling of the EVS speech codec..... | 31 |
| 5.13.4 | Handling of the OPUS speech and audio codec for WebRTC..... | 49 |
| 5.14 | Multimedia Priority Service (MPS) Support..... | 52 |
| 5.15 | Coordination of Video Orientation..... | 53 |
| 5.16 | Generic image attributes..... | 54 |
| 5.17 | TCP bearer connection control..... | 54 |
| 5.17.1 | Stateless TCP handling | 54 |
| 5.17.2 | State-aware TCP handling | 55 |
| 5.17.2.1 | General | 55 |
| 5.17.2.2 | State-aware TCP handling without support of modifying the TCP setup direction | 55 |
| 5.17.2.3 | State-aware TCP handling with support of modifying the TCP setup direction | 56 |
| 5.18 | Interactive Connectivity Establishment (ICE)..... | 58 |
| 5.18.1 | General..... | 58 |
| 5.18.2 | ICE lite..... | 58 |
| 5.18.3 | Full ICE | 60 |
| 5.18.4 | STUN consent freshness for WebRTC | 62 |
| 5.19 | MSRP handling | 62 |
| 5.19.1 | General..... | 62 |
| 5.19.2 | IMS-ALG procedures to support IETF RFC 6714 with application agnostic MSRP handling by the IMS-AGW | 63 |
| 5.19.3 | IMS-ALG procedures to support IETF draft-ietf-simple-msrp-sessmatch with application agnostic MSRP handling by the IMS-AGW | 63 |
| 5.19.4 | IMS-ALG procedures for application aware MSRP interworking by the IMS-AGW | 64 |
| 5.19.5 | Application-aware MSRP interworking at the IMS-AGW | 64 |
| 5.19.6 | MSRP data channels | 64 |
| 5.20 | Web Real-Time Communication (WebRTC)..... | 65 |
| 5.20.1 | General..... | 65 |
| 5.20.2 | WebRTC data channel | 66 |
| 5.20.2.1 | General | 66 |
| 5.20.2.2 | Data Channel Establishment | 66 |
| 5.20.2.3 | Data Channel Release | 71 |
| 5.20.2.3.1 | General | 71 |
| 5.20.2.3.2 | Release of one WebRTC data channel | 72 |
| 5.20.2.3.3 | Release of all or last active WebRTC data channels within an SCTP Association | 73 |
| 5.20.2.4 | MSRP within WebRTC data channel..... | 74 |
| 5.20.2.5 | BFCP within WebRTC data channel..... | 74 |
| 5.20.2.6 | T.140 within WebRTC data channel..... | 74 |
| 5.20.3 | Media Plane Optimization | 75 |
| 5.20.3.1 | General | 75 |
| 5.20.3.2 | WIC originating call..... | 75 |
| 5.20.3.3 | WIC terminating call | 77 |
| 5.21 | Alternate Connection (ALTC) Addresses Management..... | 78 |
| 5.21.1 | General..... | 78 |
| 5.22 | Video Region-of-Interest (ROI) | 79 |
| 5.22.1 | General..... | 79 |
| 5.22.2 | "Far End Camera Control" mode | 79 |
| 5.22.3 | "Predefined ROI" mode | 79 |
| 5.22.4 | "Arbitrary ROI" mode..... | 80 |
| 5.23 | SDP Capability Negotiation (SDPCapNeg) | 81 |
| 5.24 | RTP-level pause and resume | 82 |
| 5.25 | RTCP Codec Control Commands and Indications | 82 |
| 6 | IMS-ALG to IMS-AGW Procedures | 84 |
| 6.1 | Non-Call Related Procedures | 84 |
| 6.1.1 | General..... | 84 |
| 6.1.2 | IMS-AGW Unavailable | 84 |
| 6.1.3 | IMS-AGW Available | 85 |
| 6.1.4 | IMS-AGW Recovery | 86 |
| 6.1.5 | IMS-ALG Recovery | 86 |
| 6.1.5.1 | General | 86 |
| 6.1.5.2 | IMS-ALG Restoration..... | 87 |
| 6.1.6 | IMS-AGW Re-register..... | 87 |

| | | |
|----------------|--|-----|
| 6.1.7 | IMS-AGW Re-registration Ordered by IMS-ALG | 88 |
| 6.1.8 | Audit of IMS-AGW | 88 |
| 6.1.8.1 | Audit of Value..... | 88 |
| 6.1.8.2 | Audit of Capability..... | 89 |
| 6.1.9 | IMS-AGW Capability Change..... | 89 |
| 6.1.10 | IMS-ALG Out of service | 89 |
| 6.1.11 | IMS-AGW Resource Congestion Handling - Activate | 90 |
| 6.1.12 | MGW Resource Congestion Handling -Indication | 90 |
| 6.1.13 | Control association monitoring..... | 90 |
| 6.1.14 | Realm Availability Monitoring..... | 91 |
| 6.1.15 | Failure of IP Port, Interface or Group of Interfaces | 92 |
| 6.2 | Call Related Procedures | 92 |
| 6.2.1 | Gate Control & Local NA(P)T procedure..... | 92 |
| 6.2.2 | IP realm indication procedure..... | 95 |
| 6.2.3 | Remote NA(P)T traversal support procedure | 95 |
| 6.2.4 | Remote Source Address/Port Filtering | 95 |
| 6.2.5 | Traffic Policing | 96 |
| 6.2.6 | Hanging Termination Detection | 96 |
| 6.2.7 | QoS Packet Marking..... | 97 |
| 6.2.8 | Media Inactivity Detection | 97 |
| 6.2.9 | Handling of RTCP streams | 98 |
| 6.2.10 | IMS end-to-access-edge Media Plane Security..... | 98 |
| 6.2.10.1 | General | 98 |
| 6.2.10.2 | End-to-access-edge security for RTP based media using SDES | 98 |
| 6.2.10.3 | End-to-access-edge security for TCP-based media using TLS | 98 |
| 6.2.10.3.1 | End-to-access-edge security for session based messaging (MSRP) | 98 |
| 6.2.10.3.1.1 | IMS UE originating procedures for e2ae | 98 |
| 6.2.10.3.1.1.1 | Incoming TCP bearer establishment triggers an outgoing TCP bearer establishment | 98 |
| 6.2.10.3.1.1.2 | IMS-ALG requests sending an outgoing TCP bearer establishment | 101 |
| 6.2.10.3.1.2 | IMS UE terminating procedures for e2ae | 103 |
| 6.2.10.3.1.2.1 | Incoming TCP bearer establishment triggers an outgoing TCP bearer establishment | 103 |
| 6.2.10.3.1.2.2 | IMS-ALG requests sending an outgoing TCP bearer establishment | 106 |
| 6.2.10.3.2 | End-to-access-edge security for conferencing (BFCP)..... | 108 |
| 6.2.10.3.2.1 | IMS UE originating procedures for e2ae | 108 |
| 6.2.10.3.2.1.1 | Incoming TCP bearer establishment triggers an outgoing TCP bearer establishment | 108 |
| 6.2.10.3.2.2 | IMS UE terminating procedures for e2ae | 111 |
| 6.2.10.3.2.2.1 | Incoming TCP bearer establishment triggers an outgoing TCP bearer establishment | 111 |
| 6.2.10.4 | End-to-access-edge security for UDP based media using DTLS | 114 |
| 6.2.10.4.1 | General | 114 |
| 6.2.10.4.2 | Session establishment from IMS access network for T.38 fax using "UDP/TLS/UDPTL" | 114 |
| 6.2.10.4.3 | Session establishment towards IMS access network for T.38 fax using "UDP/TLS/UDPTL" | 117 |
| 6.2.10.4.4 | IMS-AGW procedure for e2ae security of T.38 fax using "UDP/TLS/UDPTL" | 119 |
| 6.2.10.4.5 | DTLS session establishment failure indication | 119 |
| 6.2.10.5 | End-to-access-edge security for RTP based media using DTLS-SRTP..... | 120 |
| 6.2.10.6 | End-to-access-edge security for WebRTC data channels using SCTP-over-DTLS transport..... | 124 |
| 6.2.10.6.1 | General | 124 |
| 6.2.10.6.2 | Call flow for data channel establishment from WIC towards IMS access network and MSRP session establishment..... | 124 |
| 6.2.10A | IMS end-to-end Media Plane Security | 127 |
| 6.2.10A.1 | End-to-end security for RTP based media using SDES | 127 |
| 6.2.10A.2 | End-to-end security for TCP-based media using TLS | 127 |
| 6.2.11 | Change Through-Connection..... | 127 |
| 6.2.12 | Emergency Calls | 127 |
| 6.2.13 | Explicit Congestion Notification support | 127 |
| 6.2.13.1 | General | 127 |
| 6.2.13.2 | ECN Active Indicated (ECN transparent) | 127 |
| 6.2.13.3 | ECN support requested (ECN endpoint) | 128 |
| 6.2.13.4 | ECN Failure Indication (ECN endpoint) | 128 |
| 6.2.14 | Access Transfer procedures with media anchored in IMS-AGW (ATGW) | 129 |
| 6.2.14.1 | General | 129 |
| 6.2.14.2 | H.248 context model | 129 |

| | | |
|------------|---|-----|
| 6.2.14.3 | PS session origination or termination with media anchoring in IMS-AGW (ATGW) signaling procedures | 131 |
| 6.2.14.4 | PS to CS Access Transfer procedure with media anchored in IMS-AGW (ATGW)..... | 133 |
| 6.2.14.5 | ECN support during PS to CS Access Transfer procedure with media anchored in IMS-AGW (ATGW)..... | 134 |
| 6.2.14.6 | Support of generic image attributes | 135 |
| 6.2.14.6.1 | General | 135 |
| 6.2.14.6.2 | Indication of generic image attributes | 136 |
| 6.2.14.7 | Handling of common codec parameters..... | 136 |
| 6.2.14.8 | EVS speech codec support | 137 |
| 6.2.15 | Multimedia Priority Congestion Control Procedures..... | 152 |
| 6.2.15.1 | General | 152 |
| 6.2.15.2 | IMS-AGW Resource Congestion in ADD response, request is queued..... | 152 |
| 6.2.15.3 | IMS-AGW Resource Congestion in ADD response, IMS-ALG seizes new IMS-AGW | 153 |
| 6.2.15.4 | IMS-AGW Priority Resource Allocation..... | 153 |
| 6.2.15.5 | IMS-AGW Priority User Data marking | 154 |
| 6.2.15.6 | IMS-AGW Priority Modification..... | 154 |
| 6.2.16 | Coordination of Video Orientation | 155 |
| 6.2.17 | Procedures for Interactive Connectivity Establishment (ICE) | 156 |
| 6.2.17.1 | ICE lite | 156 |
| 6.2.17.2 | Full ICE..... | 156 |
| 6.2.17.3 | Connectivity check result notification (full ICE) | 157 |
| 6.2.17.4 | New peer reflexive candidate notification (full ICE) | 157 |
| 6.2.17.5 | STUN consent freshness test..... | 158 |
| 6.2.17.6 | STUN Consent Freshness Test Failure Notification | 159 |
| 6.2.18 | TCP bearer connection control | 159 |
| 6.2.18.1 | General | 159 |
| 6.2.18.2 | Stateless TCP handling | 159 |
| 6.2.18.3 | State-aware TCP handling without support of modifying the TCP setup direction | 159 |
| 6.2.18.4 | State-aware TCP handling with support of modifying the TCP setup direction | 159 |
| 6.2.19 | Application-aware MSRP interworking at the IMS-AGW | 161 |
| 6.2.20 | Alternate Connection (ALTC) Addresses Management | 162 |
| 6.2.21 | Video Region-of-Interest (ROI)..... | 164 |
| 6.2.21.1 | Video Region-of-Interest (ROI) using FECC..... | 164 |
| 6.2.21.2 | "Predefined ROI" mode | 165 |
| 6.2.21.3 | "Arbitrary ROI" mode | 166 |
| 6.2.22 | WebRTC | 167 |
| 6.2.22.1 | Establishment of a WebRTC data channel..... | 167 |
| 6.2.22.2 | Release of a WebRTC data channel | 167 |
| 6.2.22.3 | Media Plane Optimization..... | 169 |
| 6.2.22.3.1 | Media Plane Optimization including DTLS layer for WIC originating call..... | 169 |
| 6.2.22.3.2 | Media Plane Optimization excluding DTLS layer for WIC originating call | 171 |
| 6.2.23 | RTP-level pause and resume..... | 173 |
| 6.2.24 | RTCP Codec Control Commands and Indications..... | 173 |
| 7 | Charging | 174 |
| 8 | Messages/Procedures and Contents..... | 175 |
| 8.1 | General | 175 |
| 8.2 | Reserve and Configure AGW Connection Point | 176 |
| 8.3 | Reserve AGW Connection Point Procedure..... | 185 |
| 8.4 | Configure AGW Connection Point Procedure | 192 |
| 8.5 | Release AGW Termination | 200 |
| 8.6 | Termination heartbeat indication..... | 200 |
| 8.7 | IMS-AGW Out-of-Service | 201 |
| 8.8 | IMS-AGW Communication Up | 201 |
| 8.9 | IMS-AGW Restoration..... | 202 |
| 8.10 | IMS-AGW Register..... | 202 |
| 8.11 | IMS-ALG Restoration..... | 203 |
| 8.12 | IMS-AGW Re-register | 203 |
| 8.13 | IMS-ALG Ordered Re-registration | 204 |
| 8.14 | Audit Value | 204 |

| | | |
|-------------------------------|--|------------|
| 8.15 | Audit Capability | 205 |
| 8.16 | Capability Update..... | 205 |
| 8.17 | IMS-ALG Out of Service | 206 |
| 8.18 | IMS-AGW Resource Congestion Handling - Activate..... | 206 |
| 8.19 | IMS-AGW Resource Congestion Handling - Indication..... | 207 |
| 8.20 | Inactivity Timeout Activate..... | 207 |
| 8.21 | Inactivity Timeout Notification..... | 208 |
| 8.22 | Command Reject | 208 |
| 8.23 | Realm Availability Activate | 209 |
| 8.24 | Realm Availability Notification | 209 |
| 8.25 | IP Bearer Released | 210 |
| 8.26 | Media Inactivity Notification | 210 |
| 8.27 | Termination Out-of-Service | 211 |
| 8.28 | Change Through-Connection | 211 |
| 8.29 | Change Flow Direction | 212 |
| 8.30 | ECN Failure Indication | 212 |
| 8.31 | Notify (D)TLS session establishment Failure Indication | 213 |
| 8.32 | Notify TCP connection establishment Failure Indication..... | 213 |
| 8.33 | ICE Connectivity Check Result Notification | 214 |
| 8.34 | ICE New Peer Reflexive Candidate Notification..... | 214 |
| 8.35 | STUN Consent Freshness Test Failure Notification | 215 |
| 8.36 | Notify SCTP Stream Reset..... | 215 |
| 8.37 | Notify SCTP Stream Reset Result..... | 216 |
| Annex A (informative): | Change history | 217 |
| History | | 219 |

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

Annex G of 3GPP TS 23.228 [2] gives out an IMS Application Level Gateway (IMS-ALG) and IMS Access Media Gateway (IMS-AGW) based reference model to support NAPT-PT, gate control and traffic policing between IP-CAN and IMS domain.

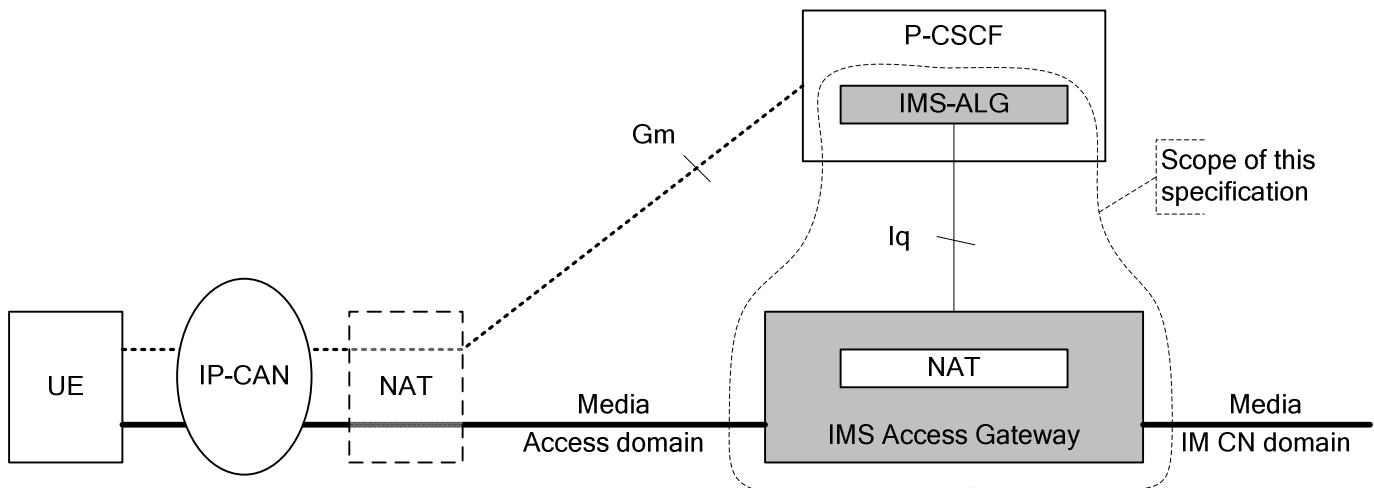


Figure 1.1: Scope of the specification

Figure 1.1 illustrates the reference model for Iq:

- the dashed line represents the IP signalling-path with SIP (at Gm) as call/session control protocol between the UE and the P-CSCF (IMS-ALG);
- the bold, horizontal line represents the IP media-path (also known as (IP) bearer-path or (IP) data-path; the notion 'media' is used as generic term for "IP application data"); and
- the vertical line represents the Iq control-path with H.248 as gateway/policy control protocol between the IMS-ALG and the IMS-AGW (H.248 messages are transported over IP).

The Iq reference point is between the P-CSCF (IMS-ALG) and the IMS-AGW. It conveys the necessary information that is needed to allocate, modify and release (IP) transport addresses.

The present document defines the stage 2 description for the Iq reference point. The stage 2 shall cover the information flow between the P-CSCF (IMS-ALG) and IMS-AGW. The protocol used over the Iq interface is the gateway control protocol according ITU-T Recommendation H.248 (which is specified for Iq by an H.248 profile according 3GPP TS 29.334 [3]).

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

[1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".

[2] 3GPP TS 23.228: "IP Multimedia Subsystem (IMS), stage 2".