



**American Water Works  
Association**

*Dedicated to the World's Most Important Resource®*

**ANSI/AWWA C651-14**  
(Revision of ANSI/AWWA C651-05)

**AWWA Standard**

# Disinfecting Water Mains

Effective date: Feb. 1, 2015.  
First edition approved by AWWA Board of Directors Sept. 30, 1947.  
This edition approved June 8, 2014.  
Approved by American National Standards Institute Nov. 18, 2014.  
Addendum incorporated Jan. 2020.




## AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or codes of any governmental authority. AWWA standards are intended to represent a consensus of the water supply industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed in the Official Notice section of *Journal - American Water Works Association*. The action becomes effective on the first day of the month following the month of *Journal - American Water Works Association* publication of the official notice.

## American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; 212.642.4900, or emailing [info@ansi.org](mailto:info@ansi.org).

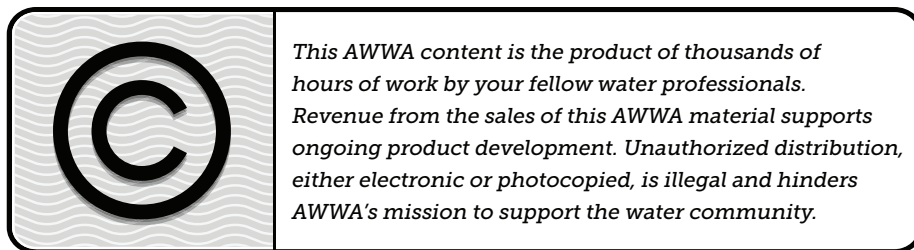

ISBN-13, print: 978-1-62576-046-3

eISBN-13, electronic: 978-1-61300-310-7

DOI: <http://dx.doi.org/10.12999/AWWA.C651.14>

---

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopy, recording, or any information or retrieval system, except in the form of brief excerpts or quotations for review purposes, without the written permission of the publisher.

Copyright © 2015 by American Water Works Association  
Printed in USA

# Contents

*All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.*

SEC.	PAGE	SEC.	PAGE
<b>Foreword</b>		4.4	Continuous-Feed Method of Chlorination..... 6
I	Introduction..... vii	4.5	Slug Method of Chlorination ..... 10
I.A	Background..... vii	4.6	Spray Disinfection for Large Transmission Lines..... 11
I.B	History..... vii	4.7	Basic Disinfection Procedure for New Mains ..... 11
I.C	Acceptance..... vii	4.8	Preventive and Corrective Measures During New Construction ..... 12
II	Special Issues..... viii	4.9	Final Flushing for New Mains..... 14
II.A	Information on Application of This Standard..... viii	4.10	Final Connections to Existing Mains..... 14
III	Use of This Standard ..... xi	4.11	Disinfection Procedures When Cutting Into or Repairing Existing Pipe ..... 15
III.A	Purchaser Options and Alternatives ..... xi	<b>5</b>	<b>Verification</b>
III.B	Modification to Standard ..... xii	5.1	Bacteriological Tests ..... 19
IV	Major Revisions..... xii	5.2	Optional Sampling and Testing..... 21
V	Comments ..... xiii	<b>6</b>	<b>Delivery</b> ..... 21
<b>Standard</b>		<b>Appendixes</b>	
<b>1</b>	<b>General</b>	A	Chlorine Residual Testing ..... 23
1.1	Scope ..... 1	A.1	DPD Drop Dilution Method (for Field Test) ..... 23
1.2	Purpose ..... 1	A.2	High-Range Chlorine Test Kits..... 24
1.3	Application..... 1	B	Chlorine Dosages ..... 25
<b>2</b>	<b>References</b> ..... 2	<b>Figures</b>	
<b>3</b>	<b>Definitions</b> ..... 2	1	Suggested Temporary Flushing/Testing Connection ..... 7
<b>4</b>	<b>Requirements</b>		
4.1	Forms of Chlorine for Disinfection ... 3		
4.2	General Considerations for All Methods of Chlorination..... 4		
4.3	Tablet/Granule Method of Chlorination..... 5		

SEC.	PAGE	SEC.	PAGE
2	9	4	9
Suggested Combination Blowoff and Sampling Tap .....		Chlorine Required to Produce an Initial 25-mg/L Concentration in 100 ft (30.5 m) of Pipe by Diameter .....	
<b>Tables</b>			
1	5	B.1	25
Weight of Calcium Hypochlorite Granules to Be Placed at Beginning of Main and at Each 500-ft (150-m) Interval .....		Amounts of Chemicals Required to Produce Various Chlorine Concentrations in 100,000 gal (378.5 m <sup>3</sup> ) of Water.....	
2	6	B.2	25
Number of 5-g Calcium Hypochlorite Tablets Required for Dose of 25 mg/L .....		Amounts of Chemicals Required to Produce Chlorine Concentrations of 200 mL in Various Volumes of Water .....	
3	7		
Required Flow and Openings (Either Taps or Hydrants) to Flush Pipelines at 3.0 ft/sec (0.91 m/sec) (40 psi [276 kPa] Residual Pressure in Water Main) .....			

---



**American Water Works  
Association**

*Dedicated to the World's Most Important Resource®*

**ANSI/AWWA C651-14**  
(Revision of ANSI/AWWA C651-05)

**AWWA Standard**

---

# Disinfecting Water Mains

---

## SECTION 1: GENERAL

---

### **Sec. 1.1 Scope**

This standard describes essential procedures for the disinfection of new and repaired potable water mains. New water mains shall be disinfected before they are placed in service. Water mains taken out of service for inspection, repair, or other activities may or may not require disinfection and sampling, depending on the risk of contamination. This standard described the process for evaluating the risk under different conditions. This standard is meant to be used for water mains within public water systems and is not intended for premise plumbing systems in buildings. Premise plumbing components in building use a wide variety of materials, including some that may not be compatible with the chlorine concentrations in this standard.

### **Sec. 1.2 Purpose**

The purpose of this standard is to define the minimum requirements for the disinfection of water mains, including the preparation of water mains, application of chlorine, and sampling and testing for the presence of coliform bacteria.

### **Sec. 1.3 Application**

This standard can be referenced in the purchase documents for the disinfection of water mains and can be used as a guide for the preparation of water mains, application of chlorine, and sampling and testing for the presence of coliform bacteria. The stipulations of this standard apply when this document has been referenced and only to the disinfection of water mains.