

BS EN 60728-1:2014



BSI Standards Publication

Cable networks for television signals, sound signals and interactive services

Part 1: System performance of forward paths

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of EN 60728-1:2014. It is identical to IEC 60728-1:2014. It supersedes BS EN 60728-1:2008 which is withdrawn.

The UK participation in its preparation was entrusted by Technical Committee EPL/100, Audio, video and multimedia systems and equipment, to Subcommittee EPL/100/4, Cable distribution equipment and systems.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2014.
Published by BSI Standards Limited 2014

ISBN 978 0 580 79843 6
ICS 33.060.40

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 September 2014.

Amendments/corrigenda issued since publication

| Date | Text affected |
|------|---------------|
|------|---------------|

English Version

Cable networks for television signals, sound signals and
interactive services - Part 1: System performance of forward
paths
(IEC 60728-1:2014)

Réseaux de distribution par câbles pour signaux de
télévision, signaux de radiodiffusion sonore et services
interactifs - Partie 1: Caractéristiques des systèmes de voie
directe
(CEI 60728-1:2014)

Kabelnetze für Fernsehsignale, Tonsignale und interaktive
Dienste - Teil 1: Systemanforderungen in Vorwärtsrichtung
(IEC 60728-1:2014)

This European Standard was approved by CENELEC on 2014-06-27. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Foreword

The text of document 100/2269/FDIS, future edition 5 of IEC 60728-1, prepared by Technical Area 5 "Cable networks for television signals, sound signals and interactive services" of IEC/TC 100 "Audio, video and multimedia systems and equipment" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 60728-1:2014.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2015-03-27
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2017-06-27

This document supersedes EN 60728-1:2008.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

For this European Standard the informative Annex K of IEC 60728-1:2014 shall be disregarded and has been replaced by the informative Annex ZB "A-deviations".

Annexes ZA and ZB have been added by CENELEC.

Endorsement notice

The text of the International Standard IEC 60728-1:2014 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

| | | |
|----------------------|------|---|
| IEC 60728 Series | NOTE | Harmonized as EN 60728 Series (not modified). |
| IEC 61169-2 | NOTE | Harmonized as EN 61169-2 (not modified). |
| IEC 61169-24 | NOTE | Harmonized as EN 61169-24 (not modified). |
| CISPR 16-1 Series | NOTE | Harmonized as EN 55016-1 Series (not modified). |
| ISO/IEC 13818 Series | NOTE | Harmonized as EN ISO/IEC 13818 Series ¹⁾ (not modified). |
| ISO/IEC 13818-3 | NOTE | Harmonized as EN ISO/IEC 13818-3 ¹⁾ (not modified). |

¹⁾ Withdrawn.

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 When an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu

| <u>Publication</u> | <u>Year</u> | <u>Title</u> | <u>EN/HD</u> | <u>Year</u> |
|--------------------|-------------|---|--------------|-------------|
| | | Characteristics of DAB receivers | EN 50248 | 2001 |
| IEC 60050-705 | - | International Electrotechnical Vocabulary (IEV) - Chapter 705: Radio wave propagation | - | - |
| IEC 60050-712 | 1992 | International Electrotechnical Vocabulary (IEV) - Chapter 712: Antennas | - | - |
| IEC 60050-725 | - | International Electrotechnical Vocabulary (IEV) - Chapter 725: Space radiocommunications | - | - |
| IEC 60728-1-1 | - | Cable networks for television signals, sound signals and interactive services - Part 1-1: RF cabling for two way home networks | EN 60728-1-1 | - |
| IEC 60728-1-2 | - | Cable networks for television signals, sound signals and interactive services - Part 1-2: Performance requirements or signals delivered at the system outlet in operation | EN 60728-1-2 | - |
| IEC 60728-2 | - | Cable networks for television signals, sound signals and interactive services - Part 2: Electromagnetic compatibility for equipment | EN 50083-2 | - |
| IEC 60728-3 | 2010 | Cable networks for television signals, sound signals and interactive services - Part 3: Active wideband equipment for cable networks | EN 60728-3 | 2011 |
| IEC 60728-5 | - | Cable networks for television signals, sound signals and interactive services - Part 5: Headend equipment | EN 60728-5 | - |
| IEC 60728-10 | - | Cable networks for television signals, sound signals and interactive services - Part 10: System performance of return paths | EN 60728-10 | - |

| | | | | |
|--------------------------------|------|---|--------------|---|
| IEC 60728-11 | - | Cable networks for television signals, sound signals and interactive services - Part 11: Safety | EN 60728-11 | - |
| IEC 60728-12 | - | Cabled distribution systems for television and sound signals - Part 12: Electromagnetic compatibility of systems | EN 50083-8 | - |
| IEC 60966-2-4 | - | Radio frequency and coaxial cable assemblies - Part 2-4: Detail specification for cable assemblies for radio and TV receivers - Frequency range 0 MHz to 3 000 MHz, IEC 61169-2 connectors | EN 60966-2-4 | - |
| IEC 60966-2-5 | - | Radio frequency and coaxial cable assemblies - Part 2-5: Detail specification for cable assemblies for radio and TV receivers - Frequency range 0 MHz to 1 000 MHz, IEC 61169-2 connectors | EN 60966-2-5 | - |
| IEC 60966-2-6 | - | Radio frequency and coaxial cable assemblies - Part 2-6: Detail specification for cable assemblies for radio and TV receivers - Frequency range 0 MHz to 3 000 MHz, IEC 61169-24 connectors | EN 60966-2-6 | - |
| ISO/IEC 13818-1 | 2007 | Information technology - Generic coding of moving pictures and associated audio information: Systems | | - |
| ISO/IEC 13818-4 | | Information technology - Generic coding of moving pictures and associated audio information - Part 4: Conformance testing | | - |
| ISO/IEC 14496-1 | - | Information technology - Coding of audio-visual objects - Part 1: Systems | | - |
| ITU-R Recommendation BS.412-9 | - | Planning standards for terrestrial FM sound-broadcasting at VHF | | - |
| ITU-R Recommendation BT.417-4 | | Minimum field strengths for which protection may be sought in planning an analogue terrestrial television service | | - |
| ITU-R Recommendation BT.470-7 | - | Conventional analogue television systems | | - |
| ITU-R Recommendation BT.500-11 | - | Methodology for the subjective assessment-of the quality of television pictures | | - |
| ITU-T Recommendation J.61 | - | Transmission performance of television circuits designed for use in international connections | | - |

| | | | |
|------------------------|------|---|---|
| ETSI EN 300 421 | - | Digital Video Broadcasting (DVB): Framing - structure, channel coding and modulation for 11/12 GHz satellite services | - |
| ETSI EN 300 429 | - | Digital Video Broadcasting (DVB): Framing - structure, channel coding and modulation for cable systems | - |
| ETSI EN 300 468 | - | Digital Video Broadcasting (DVB); - Specification for Service Information (SI) in DVB systems | - |
| ETSI EN 300 473 | - | Digital Video Broadcasting (DVB): Satellite - Master Antenna Television (SMATV) distribution systems | - |
| ETSI EN 300 744 | - | Digital Video Broadcasting (DVB): Framing - structure, channel coding and modulation for digital terrestrial television | - |
| ETSI EN 302 307/V1.3.1 | 2013 | Digital Video Broadcasting (DVB); Second - generation framing structure, channel coding and modulation systems for Broadcasting, Interactive Services, News Gathering and other broadband satellite applications (DVB-S2) | - |
| ETSI ETS 300 784 | - | Satellite Earth Stations and Systems (SES);Television Receive-Only (TVRO) satellite earth stations operating in the 11/12 GHz frequency bands | - |
| ETSI TS 101 211 | - | Digital Video Broadcasting (DVB); - Guidelines on implementation and usage of Service Information (SI) | - |
| ETSI TS 102 831 V1.2.1 | 2012 | Digital Video Broadcasting (DVB); - Implementation guidelines for a second generation digital terrestrial television broadcasting system (DVB-T2) | - |

Annex ZB (informative)

A-deviations

A-deviation: National deviation due to regulations, the alteration of which is for the time being outside the competence of the CENELEC national member.

This European Standard does not fall under any Directive of the EC.

In the relevant CENELEC countries these A-deviations are valid instead of the provisions of the European Standard until they have been removed.

Clause Deviation

3.1.58 Norway

According to Regulations on Electronic Communications Networks and Services (Ecom Regulations) laid down by the Norwegian Ministry of Transport and Communications on 16 February 2004, the following applies:

When installing coaxial cable-based networks, the part of the network to which the end-user is connected shall be placed in a star structure. It is not permitted to insert receiver connections into the connection between the star points.

5.4.1 Netherlands

(Dutch Technical Regulations for CATV networks (Technische Voorschriften voor Centrale Antenne Inrichtingen, 3e uitgave), 21 December 1977, which are valid for CATV networks in accordance with Article 21 of the Dutch Telecommunications law (Stb. 1988, 520))

Replace by/add the following “minimum and maximum carrier levels” regulation as indicated in Table ZB.1.

Table ZB.1 – Carrier signal levels at any system outlet

| | |
|----------------|--------------------------------|
| FM sound mono: | 80 dB(μ V) _{max} |
|----------------|--------------------------------|

(measured in accordance with CISPR 16-1 [4] (quasi-peak measurement within 120 kHz bandwidth))

5.6.2 Netherlands

(Dutch Technical Regulations for CATV networks (Technische Voorschriften voor Centrale Antenne Inrichtingen, 3e uitgave), 21 December 1977, which are valid for CATV networks in accordance with Article 21 of the Dutch Telecommunications law (Stb. 1988, 520))

Add the group delay response curve valid for PAL with FM-FM sound (Clause 5.4.1), as shown in Figure ZB.1.

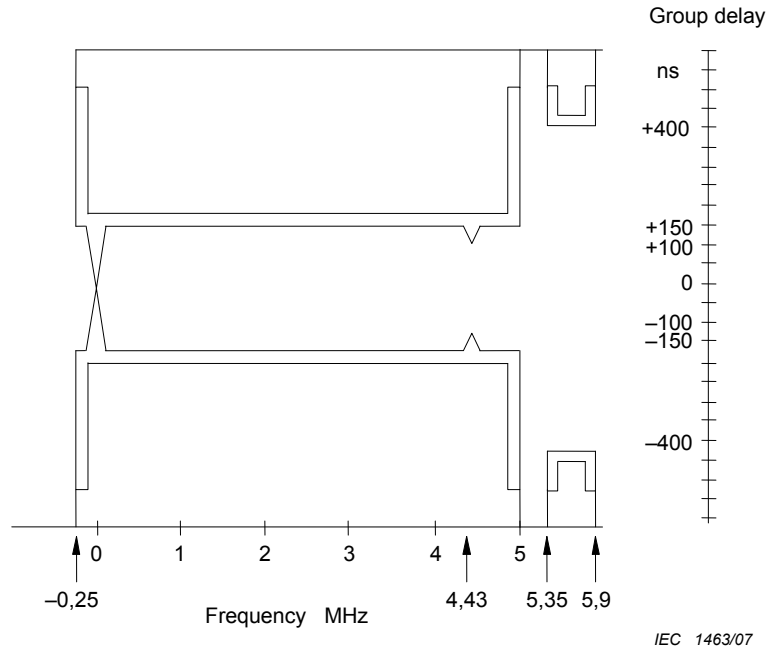


Figure ZB.1 – Mask group delay characteristic for PAL signals with FM-FM sound

5.9.1 Netherlands

(Dutch Technical Regulations for CATV networks (Technische Voorschriften voor Centrale Antenne Inrichtingen, 3e uitgave), 21 December 1977, which are valid for CATV networks in accordance with Article 21 of the Dutch Telecommunications law (Stb. 1988, 520))

Replace by/add the following “single-frequency interference” regulation as indicated in Table ZB.2.

Table ZB.2 – Single-frequency interference

| | | |
|---------------------------------------|------------------|--------------------------------------|
| AM-VSB-PAL-signals: | $C/I \geq 60$ dB | (measured in a bandwidth of 300 kHz) |
| For signals outside used TV channels: | $C/I \geq 40$ dB | |

5.10.2 Netherlands

(Dutch Technical Regulations for CATV networks (Technische Voorschriften voor Centrale Antenne Inrichtingen, 3e uitgave), 21 December 1977, which are valid for CATV networks in accordance with Article 21 of the Dutch Telecommunications law (Stb. 1988, 520))

Replace the requirements for “echoes in television channels, PAL-SECAM standards” by the “requirement for echo loss in relation to the time delay of the reflected signal for AM-PAL-TV and FM-radio” (Figure ZB.2).

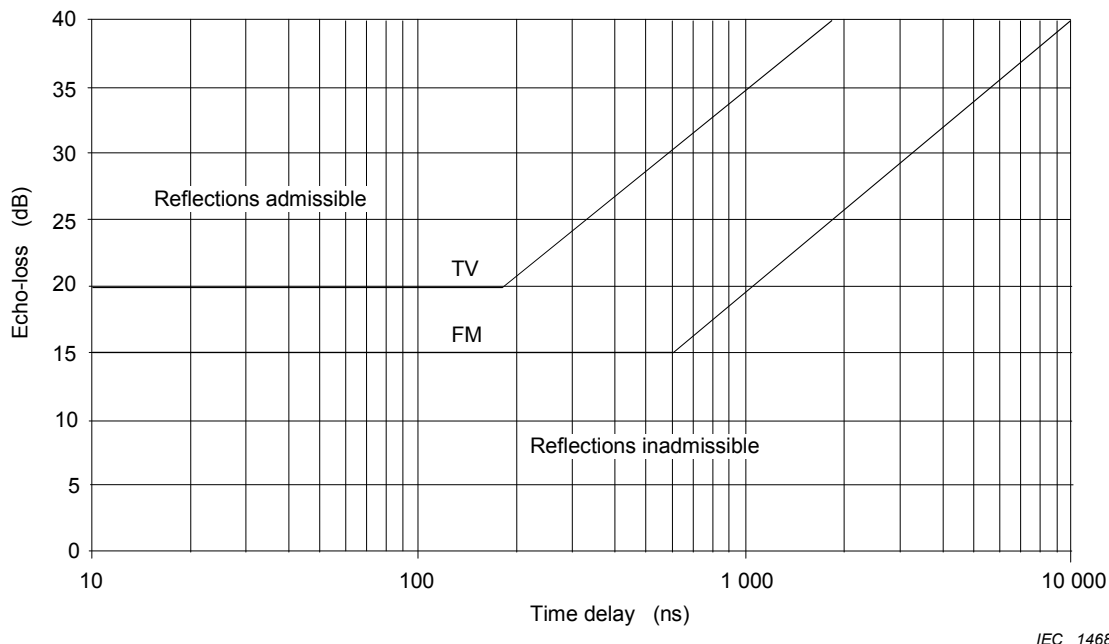


Figure ZB.2 – Requirement for echo loss in relation to the time delay of the reflected signal

5.12.1 Denmark

(Danish technical regulations for CATV-networks, which are applicable to those networks in accordance with national legislation act. nr; 277 of June 1995, given by the Ministry of Research)

Add the requirement for “decoding margin” being “the decoding margin must be 40 %, when the margin is a minimum of 70 % at the receiving antenna”.

5.14.3 Netherlands

(Dutch Technical Regulations for CATV networks (Technische Voorschriften voor Centrale Antenne Inrichtingen, 3e uitgave), 21 December 1977, which are valid for CATV networks in accordance with Article 21 of the Dutch Telecommunications law (Stb. 1988, 520))

Add the requirement for “adjacent channel spacing” by ≥ 400 kHz.

CONTENTS

| | |
|---|----|
| INTRODUCTION..... | 12 |
| 1 Scope..... | 13 |
| 2 Normative references | 13 |
| 3 Terms, definitions, symbols and abbreviations..... | 15 |
| 3.1 Terms and definitions..... | 15 |
| 3.2 Symbols..... | 27 |
| 3.3 Abbreviations..... | 29 |
| 4 Methods of measurement at system outlet..... | 31 |
| 4.1 Performance limits | 31 |
| 4.2 Mutual isolation between system outlets | 33 |
| 4.2.1 Overview | 33 |
| 4.2.2 Equipment required | 33 |
| 4.2.3 Connection of the equipment | 34 |
| 4.2.4 Measurement procedure | 34 |
| 4.2.5 Presentation of the results | 35 |
| 4.3 Amplitude response within a channel | 35 |
| 4.3.1 Overview | 35 |
| 4.3.2 Equipment required | 35 |
| 4.3.3 Connection of the equipment | 35 |
| 4.3.4 Measurement procedure | 36 |
| 4.3.5 Presentation of the results | 37 |
| 4.4 Chrominance-luminance gain and delay inequalities | 38 |
| 4.4.1 Overview | 38 |
| 4.4.2 Equipment required | 39 |
| 4.4.3 Connection of the equipment | 39 |
| 4.4.4 Measurement procedure | 39 |
| 4.4.5 Presentation of the results | 40 |
| 4.5 Non-linear distortion..... | 41 |
| 4.5.1 General | 41 |
| 4.5.2 Intermodulation..... | 41 |
| 4.5.3 Composite beat | 41 |
| 4.5.4 Composite crossmodulation | 45 |
| 4.5.5 Intermodulation noise | 46 |
| 4.5.6 Hum modulation of carriers..... | 46 |
| 4.5.7 Differential gain and phase | 51 |
| 4.6 Carrier-to-noise ratio..... | 56 |
| 4.6.1 Overview | 56 |
| 4.6.2 Equipment required | 56 |
| 4.6.3 Connection of the equipment | 56 |
| 4.6.4 Measurement set-up | 57 |
| 4.6.5 Measurement procedure | 57 |
| 4.6.6 Presentation of the results | 58 |
| 4.7 Echoes | 58 |
| 4.7.1 Overview | 58 |
| 4.7.2 Equipment required | 59 |

| | | |
|---------|---|----|
| 4.7.3 | Connection of the equipment | 59 |
| 4.7.4 | Measurement procedure | 59 |
| 4.7.5 | Presentation of the results | 60 |
| 4.8 | AM-VSB television, FM radio and FM television signal level | 60 |
| 4.8.1 | General | 60 |
| 4.8.2 | Definitions for NTSC, PAL and SECAM systems | 60 |
| 4.8.3 | Equipment required | 60 |
| 4.8.4 | Measurement procedure | 60 |
| 4.8.5 | Presentation of the results | 61 |
| 4.9 | Data echo rating and data delay inequality | 61 |
| 4.10 | Interference in FM sound radio channels | 61 |
| 4.11 | Methods of measurement for digitally modulated signals | 61 |
| 4.11.1 | Overview | 61 |
| 4.11.2 | Basic assumptions and measurement interfaces | 62 |
| 4.11.3 | Signal level for digitally modulated signals | 65 |
| 4.11.4 | RF signal-to-noise ratio $S_{D,RF}/N$ for digitally modulated signals | 66 |
| 4.11.5 | Bit error ratio (BER) | 68 |
| 4.11.6 | BER versus E_b/N_0 or C/N | 69 |
| 4.11.7 | Noise margin | 73 |
| 4.11.8 | Modulation error ratio (MER) | 74 |
| 4.11.9 | Phase jitter | 76 |
| 4.11.10 | Phase noise of an RF carrier | 79 |
| 5 | Performance requirements at system outlet | 82 |
| 5.1 | General | 82 |
| 5.2 | Impedance | 82 |
| 5.3 | Requirements at the terminal input | 82 |
| 5.3.1 | General | 82 |
| 5.3.2 | Signal level | 83 |
| 5.3.3 | Other parameters | 83 |
| 5.4 | Carrier levels at system outlets | 83 |
| 5.4.1 | Minimum and maximum carrier levels | 83 |
| 5.4.2 | Carrier level differences | 85 |
| 5.5 | Mutual isolation between system outlets | 86 |
| 5.5.1 | Isolation between two subscribers | 86 |
| 5.5.2 | Isolation between individual outlets in one household | 86 |
| 5.5.3 | Isolation between forward and return path | 86 |
| 5.6 | Frequency response within a television channel at any system outlet | 87 |
| 5.6.1 | Amplitude response | 87 |
| 5.6.2 | Group delay | 87 |
| 5.7 | Long-term frequency stability of distributed carrier signals at any system outlet | 88 |
| 5.8 | Random noise | 89 |
| 5.9 | Interference to television channels | 91 |
| 5.9.1 | Single-frequency interference | 91 |
| 5.9.2 | Single-channel intermodulation interference | 92 |
| 5.9.3 | Multiple frequency intermodulation interference | 92 |
| 5.9.4 | Intermodulation noise | 92 |
| 5.9.5 | Cross-modulation | 93 |

| | | |
|--------|--|-----|
| 5.10 | Video baseband requirements..... | 93 |
| 5.10.1 | Differential gain and phase in any television channel..... | 93 |
| 5.10.2 | Echoes..... | 93 |
| 5.11 | Hum modulation of carriers in television channels..... | 93 |
| 5.12 | Requirements for data signal transmission..... | 94 |
| 5.12.1 | Data signals carried in the structure of a television signal..... | 94 |
| 5.12.2 | Data signals other than those carried within the structure of a television signal..... | 94 |
| 5.13 | Digitally modulated signals – Additional performance requirements..... | 94 |
| 5.13.1 | DVB (PSK, QAM, OFDM) performance..... | 94 |
| 5.13.2 | NICAM performance..... | 96 |
| 5.13.3 | DAB performance..... | 96 |
| 5.14 | FM sound radio – Additional performance requirements..... | 97 |
| 5.14.1 | Amplitude response within an FM channel..... | 97 |
| 5.14.2 | Phase response within an FM channel..... | 97 |
| 5.14.3 | Interference within an FM channel..... | 97 |
| 5.14.4 | AM hum modulation on FM sound carriers..... | 97 |
| 5.14.5 | Echoes within an FM channel..... | 97 |
| 6 | Performance requirements at receiving antennas..... | 97 |
| 6.1 | General..... | 97 |
| 6.2 | Method of measurement of field strength..... | 98 |
| 6.2.1 | Overview..... | 98 |
| 6.2.2 | Equipment required..... | 98 |
| 6.2.3 | Connection of the equipment..... | 98 |
| 6.2.4 | Measurement procedure..... | 98 |
| 6.2.5 | Presentation of the results..... | 100 |
| 6.3 | Requirements..... | 100 |
| 6.3.1 | General..... | 100 |
| 6.3.2 | Field strength requirements..... | 100 |
| 6.3.3 | Quality of received signals..... | 102 |
| 6.3.4 | Safety..... | 106 |
| 6.3.5 | Electromagnetic compatibility (EMC)..... | 107 |
| 6.4 | Interference reduction..... | 107 |
| 6.4.1 | General..... | 107 |
| 6.4.2 | Active antennas..... | 107 |
| 7 | Performance requirements at home network interfaces of cable networks..... | 107 |
| 7.1 | General..... | 107 |
| 7.2 | Requirements at HNI1 for passive coaxial home networks..... | 108 |
| 7.2.1 | General..... | 108 |
| 7.2.2 | Carrier levels at the HNI1..... | 109 |
| 7.2.3 | Mutual isolation between two HNI1..... | 112 |
| 7.2.4 | Frequency response within any television channel at HNI1..... | 112 |
| 7.2.5 | Long-term frequency stability of distributed carrier signals at HNI1..... | 113 |
| 7.2.6 | Random noise at the HNI1..... | 113 |
| 7.2.7 | Interference to television channels at HNI1..... | 113 |
| 7.2.8 | Return path requirements at HNI1..... | 114 |
| 7.3 | Requirements at HNI2 for active coaxial home networks..... | 114 |
| 7.3.1 | General..... | 114 |

| | | |
|--|--|-----|
| 7.3.2 | Carrier levels at the HNI2 | 114 |
| 7.3.3 | Mutual isolation between two HNI2 | 117 |
| 7.3.4 | Frequency response within any television channel at HNI2 | 117 |
| 7.3.5 | Long-term frequency stability of distributed carrier signals at HNI2 | 117 |
| 7.3.6 | Random noise at HNI2 | 118 |
| 7.3.7 | Interference to television channels at the HNI2 | 121 |
| 7.3.8 | Return path requirements at HNI2 | 122 |
| 7.4 | Requirements at HNI3 and at system outlet or terminal input when the home network is mainly of balanced type | 122 |
| 7.4.1 | Overview | 122 |
| 7.4.2 | Requirements at HNI3 | 122 |
| 7.4.3 | Requirements at system output | 123 |
| 7.4.4 | Additional requirements at HNI3 for upstream transmission | 123 |
| 7.5 | Requirements at HNI3 (Case C) | 124 |
| 7.6 | Requirements at HNI3 (Case D) | 124 |
| Annex A (informative) Reception of television signals | | 125 |
| Annex B (normative) Calibration of modulation depth | | 130 |
| B.1 | Equipment required | 130 |
| B.2 | Connection of the equipment | 130 |
| B.3 | Calibration procedure | 130 |
| Annex C (normative) Equipment required – Additional items | | 131 |
| C.1 | Measuring receiver preamplifier | 131 |
| C.2 | Measuring receiver input filter | 131 |
| Annex D (normative) Preliminary checks on the measuring equipment for carrier-to-noise ratio | | 132 |
| D.1 | Noise | 132 |
| D.2 | Intermodulation | 132 |
| D.3 | Overload | 132 |
| Annex E (normative) Correction factors | | 133 |
| E.1 | Level correction factor C_m | 133 |
| E.2 | Bandwidth correction factor C_b | 133 |
| Annex F (normative) Calibration of the measuring receiver | | 134 |
| Annex G (normative) Correction factors for noise | | 135 |
| G.1 | Signal level measurement | 135 |
| G.2 | Noise level measurement | 135 |
| Annex H (normative) Null packet and PRBS definitions | | 137 |
| H.1 | Null packet definition | 137 |
| H.2 | PRBS definition | 138 |
| Annex I (normative) Digital signal level and bandwidth | | 139 |
| I.1 | RF/IF power (carrier) | 139 |
| I.2 | Bandwidth of a digital signal | 139 |
| I.2.1 | Occupied bandwidth | 139 |
| I.2.2 | Noise bandwidth | 140 |
| I.2.3 | Equivalent signal bandwidth | 140 |
| I.3 | Examples | 141 |
| Annex J (normative) Correction factor for a spectrum analyser | | 142 |
| Annex K (informative) Differences in some countries | | 143 |

| | | |
|------|---|-----|
| K.1 | Subclause 3.1.58, Norway | 143 |
| K.2 | Subclause 5.4.1, Japan, Netherlands | 143 |
| | K.2.1 Japan | 143 |
| | K.2.2 Netherlands | 143 |
| K.3 | Subclause 5.4.2, Japan | 143 |
| K.4 | Subclause 5.5.1, Japan | 144 |
| K.5 | Subclause 5.6.1, Japan | 145 |
| K.6 | Subclause 5.6.2, Netherlands | 145 |
| K.7 | Subclause 5.7, Japan | 146 |
| K.8 | Subclause 5.8, Japan | 146 |
| K.9 | Subclause 5.9.1, Japan, Netherlands | 147 |
| | K.9.1 Japan | 147 |
| | K.9.2 Netherlands | 148 |
| K.10 | Subclause 5.9.5, Japan | 149 |
| K.11 | Subclause 5.10.2, Netherlands, Japan | 149 |
| | K.11.1 Netherlands | 149 |
| | K.11.2 Japan | 149 |
| K.12 | Subclause 5.11, Japan | 150 |
| K.13 | Subclause 5.12.1, Denmark | 151 |
| K.14 | Subclause 5.13.1.5, Japan | 151 |
| K.15 | Subclause 5.14.3, Netherlands | 151 |
| K.16 | Clause 7, Japan | 151 |
| | Bibliography | 152 |
| | Figure 1 – Arrangement of test equipment for measurement of mutual isolation between system outlets | 34 |
| | Figure 2 – Arrangement of test equipment for measurement of frequency response within a channel | 36 |
| | Figure 3 – Interpretation of displays for measurement of frequency response within a channel | 37 |
| | Figure 4 – Test signal (signal <i>F</i> for 625-line systems) employed for chrominance/luminance gain and delay inequality | 38 |
| | Figure 5 – Test signal (signal B2 for 625-line systems) employed for chrominance/luminance gain and delay inequality | 38 |
| | Figure 6 – Arrangement of test equipment for measurement of chrominance/luminance gain and delay inequality | 39 |
| | Figure 7 – Displayed pulses: chrominance low and lagging | 40 |
| | Figure 8 – Displayed pulses: chrominance high and leading | 40 |
| | Figure 9 – Connection of test equipment for the measurement of non-linear distortion by composite beat | 42 |
| | Figure 10 – Weighting curve for 625-line system B, G and D1 (PAL): CW interference with no special (frequency offset) control | 44 |
| | Figure 11 – Weighting curve for 625-line system I (PAL): CW interference with no special (frequency offset) control | 44 |
| | Figure 12 – Weighting curve for 625-line systems D and K (PAL): CW interference with no special (frequency offset) control | 45 |
| | Figure 13 – Weighting curve for 625-line system L (SECAM): CW interference with no special (frequency offset) control | 45 |
| | Figure 14 – Hum modulation envelope | 46 |

| | |
|--|-----|
| Figure 15 – Calibrated potential divider..... | 47 |
| Figure 16 – Stable variable DC source..... | 47 |
| Figure 17 – Connection of equipment for measurement of hum modulation (DC method)..... | 48 |
| Figure 18 – Oscilloscope display..... | 49 |
| Figure 19 – Connection of equipment for hum modulation measurement (AC method)..... | 50 |
| Figure 20 – Signal D2..... | 52 |
| Figure 21 – Example of the modified staircase waveform..... | 53 |
| Figure 22 – Arrangement of test equipment for measurement of differential gain and phase..... | 54 |
| Figure 23 – Arrangement of test equipment for carrier-to-noise ratio measurement..... | 56 |
| Figure 24 – Echo rating graticule..... | 58 |
| Figure 25 – Arrangement of test equipment for measurement of echo rating..... | 59 |
| Figure 26 – PSK modulation (QPSK, BPSK or TC8PSK)..... | 62 |
| Figure 27 – DVB-S2 modulation (QPSK, 8PSK, 16APSK, 32APSK)..... | 62 |
| Figure 28 – DVB-C QAM modulation..... | 62 |
| Figure 29 – DVB-T OFDM modulation..... | 63 |
| Figure 30 – DVB-T2 OFDM modulation..... | 63 |
| Figure 31 – Reference receiver for PSK demodulation (QPSK, BPSK or TC8PSK)..... | 63 |
| Figure 32 – Reference receiver for DVB-S2 demodulation (QPSK, 8PSK, 16APSK, 32APSK)..... | 64 |
| Figure 33 – Reference receiver for QAM demodulation..... | 64 |
| Figure 34 – Reference receiver for DVB-T OFDM demodulation..... | 64 |
| Figure 35 – Reference receiver (buffer model) for DVB-T2 OFDM demodulation..... | 64 |
| Figure 36 – Test set-up for BER measurement..... | 69 |
| Figure 37 – Test set-up for BER measurement versus E_b/N_0 or C/N and noise margin measurement..... | 70 |
| Figure 38 – Example of <i>BER</i> measurement versus E_b/N_0 | 72 |
| Figure 39 – Example of <i>BER</i> measurement versus C/N | 72 |
| Figure 40 – Test set-up for modulation error ratio (MER) measurement and phase jitter measurement..... | 75 |
| Figure 41 – Example of constellation diagram for a 64 QAM modulation format..... | 76 |
| Figure 42 – Example of constellation diagram for a 64 QAM modulation format with arc sections due to phase jitter..... | 78 |
| Figure 43 – Test set-up for phase noise measurement..... | 79 |
| Figure 44 – Example of mask for phase noise measurements: PSK, APSK and QAM formats..... | 81 |
| Figure 45 – Example of mask for phase noise measurements: OFDM format..... | 81 |
| Figure 46 – Home network types used to define the requirements at HNI1 (coaxial)..... | 108 |
| Figure A.1 – Example of a master antenna television system (MATV) for terrestrial reception..... | 126 |
| Figure A.2 – Example of the headend of a master antenna television system for satellite (SMATV) reception..... | 127 |
| Figure A.3 – Example of a master antenna television system for terrestrial and satellite (SMATV) reception..... | 127 |
| Figure A.4 – Example of a cabled distribution system for television and sound signals..... | 128 |

| | |
|---|-----|
| Figure A.5 – System model for downstream direction of a cable network for television and sound signals (CATV) | 129 |
| Figure B.1 – Calibration of modulation depth | 130 |
| Figure G.1 – Noise correction factor CF versus measured level difference D | 136 |
| Figure K.1 – Mask group delay characteristic for PAL signals with FM-FM sound (Netherlands)..... | 145 |
| Figure K.2 – Single-frequency interference (VSB-AM NTSC) (Japan)..... | 147 |
| Figure K.3 – Single-frequency interference (64 QAM digital) (Japan) | 148 |
| Figure K.4 – Single-frequency interference (256 QAM digital) (Japan) | 148 |
| Figure K.5 – Requirement for echo loss in relation to the time delay of the reflected signal (Netherlands)..... | 149 |
| Figure K.6 – Echoes (VSB-AM NTSC) (Japan)..... | 150 |
| Figure K.7 – Echoes (FM NTSC) (Japan)..... | 150 |
| | |
| Table 1 – Application of the methods of measurement | 32 |
| Table 2 – Residual carrier reduction factors | 49 |
| Table 3 – Frequency distance f_m | 81 |
| Table 4 – Carrier signal levels at any system outlet (analogue signals)..... | 83 |
| Table 5 – RF signal levels at any system outlet (digital signals)..... | 84 |
| Table 6 – Maximum level differences at any system outlet between distributed television channels | 85 |
| Table 7 – Mutual isolation | 86 |
| Table 8 – Residual carrier level at television or FM radio output within the same outlet or between two different outlets | 87 |
| Table 9 – Amplitude response variation | 87 |
| Table 10 – Group delay variation | 88 |
| Table 11 – Maximum deviation of the conversion frequency for digitally modulated DVB signals | 89 |
| Table 12 – Carrier-to-noise ratios at system outlet (analogue television)..... | 89 |
| Table 13 – RF signal-to noise ratio at system outlet (digital television) | 90 |
| Table 14 – Carrier-to-noise ratios at the system outlet (sound radio) | 91 |
| Table 15 – Differential gain and phase in television channels | 93 |
| Table 16 – Modulation error ratio MER of DVB signals..... | 95 |
| Table 17 – Phase jitter of a DVB signal..... | 95 |
| Table 18 – Phase noise of a DVB signal (PSK, APSK and QAM) | 96 |
| Table 19 – Phase noise of a DVB-T signal (COFDM) | 96 |
| Table 20 – Minimum field strength levels recommended by ITU-R..... | 101 |
| Table 21 – Minimum field strength levels recommended by CEPT:1997 | 101 |
| Table 22 – Minimum signal level at the headend input for the reception of analogue sound broadcasting..... | 102 |
| Table 23 – Minimum signal level at the headend input for the reception of analogue television broadcasting | 102 |
| Table 24 – Minimum signal level at the headend input for the reception of DAB signals at an error ratio of 1×10^{-4} and code rate 1/2 | 103 |
| Table 25 – Minimum signal level and RF signal-to-noise ratio at the headend input for stationary reception of DVB-T signals | 103 |

| | |
|--|-----|
| Table 26 – Minimum signal-to-noise ratio $S_{D,RF}/N$ at the headend input for DVB-T2 signals (LDPC block length 64 800 bit) | 104 |
| Table 27 – Minimum signal level and carrier-to-noise ratio at the headend input for the reception of FM modulated satellite signals..... | 104 |
| Table 28 – Minimum RF signal-to-noise ratio at the headend input for the reception of DVB-S or DVB-S2 satellite signals (AWGN channel and FECFRAME length of 64 800) | 105 |
| Table 29 – Minimum values for signal-to-disturbance ratio | 105 |
| Table 30 – Minimum values for signal-to-echo ratio | 106 |
| Table 31 – Signal level at HNI1 (analogue signals) | 109 |
| Table 32 – Signal level at HNI1 (digital signals) | 110 |
| Table 33 – Maximum level differences at HNI1 | 111 |
| Table 34 – Mutual isolation between two HNI1 | 112 |
| Table 35 – Amplitude response variation at HNI1 | 112 |
| Table 36 – Group delay variation at HNI1 | 113 |
| Table 37 – Signal level at HNI2 (analogue signals) | 114 |
| Table 38 – Signal level at HNI2 (digital signals) | 115 |
| Table 39 – Maximum level differences at HNI2 | 116 |
| Table 40 – Amplitude response variation at HNI2..... | 117 |
| Table 41 – Group delay variation at HNI2 | 117 |
| Table 42 – Carrier-to-noise ratios at HNI2 (analogue television) | 118 |
| Table 43 – RF signal-to-noise ratios at HNI2 (digital television) | 119 |
| Table 44 – Carrier-to-noise ratios at HNI2 (sound radio) | 120 |
| Table 45 – Minimum signal level at coaxial terminal input (case A) or at coaxial system outlet (case B) | 123 |
| Table G.1 – Noise correction factor..... | 135 |
| Table H.1 – Null transport stream packet definition | 138 |
| Table I.1 – Examples of bandwidths for digital modulation techniques | 141 |
| Table K.1 – Carrier signal levels at any system outlet (Japan) | 143 |
| Table K.2 – Carrier signal levels at any system outlet (Netherlands)..... | 143 |
| Table K.3 – Maximum level differences at any system outlet between distributed television channels (Japan) | 144 |
| Table K.4 – Mutual isolation (Japan)..... | 144 |
| Table K.5 – Amplitude response variation (Japan) | 145 |
| Table K.6 – Frequency stability requirements (Japan)..... | 146 |
| Table K.7 – Carrier-to-noise ratios at system outlet (Japan)..... | 146 |
| Table K.8 – Single-frequency interference (Japan)..... | 147 |
| Table K.9 – Single-frequency interference (Netherlands) | 148 |
| Table K.10 – Cross-modulation (Japan) | 149 |
| Table K.11 – Echoes requirements (Japan)..... | 149 |
| Table K.12 – Hum modulation of carriers in television channels (Japan) | 150 |
| Table K.13 – Phase noise of an RF carrier (Japan)..... | 151 |

INTRODUCTION

Standards and deliverables of the IEC 60728 series deal with cable networks including equipment and associated methods of measurement for headend reception, processing and distribution of television and sound signals and for processing, interfacing and transmitting all kinds of data signals for interactive services using all applicable transmission media. These signals are typically transmitted in networks by frequency-multiplexing techniques.

This includes for instance

- regional and local broadband cable networks,
- extended satellite and terrestrial television distribution systems,
- individual satellite and terrestrial television receiving systems,

and all kinds of equipment, systems and installations used in such cable networks, distribution and receiving systems.

The extent of this standardization work is from the antennas and/or special signal source inputs to the headend or other interface points to the network up to the terminal input of the customer premises equipment.

The standardization work will consider coexistence with users of the RF spectrum in wired and wireless transmission systems.

The standardization of any user terminals (i.e. tuners, receivers, decoders, multimedia terminals, etc.) as well as of any coaxial, balanced and optical cables and accessories thereof is excluded.

IEC 60728-1 includes the following clauses:

Clause 5 defines the system performance limits which will, with an unimpaired input, (headend input signal), produce picture and sound signals (at system outlets) where the impairment to any single parameter will not be worse, in normal operating conditions for any analogue channel, than grade four on the five-grade impairment scale contained in ITU- R Recommendation BT.500-10. For digitally modulated signals, the quality requirement is a quasi-error-free (QEF) reception.

Appropriate performance requirements for the signals at the receiving antennas site are given in Clause 6 in order to provide at the input of the headend of the cable network both analogue and digital television signals with suitable quality.

Clause 7 is applicable to home networks (including those of individual receiving systems) using coaxial cables, balanced cables or optical cables and primarily intended for television signals, sound signals and interactive services, operating between about 30 MHz and 3 000 MHz.

This clause (Clause 7), considering the basic operational characteristics of a home network, specifies the requirements with respect to the home network interface (HNI) taking into account the performance requirements given at the system outlet or at the terminal input.

CABLE NETWORKS FOR TELEVISION SIGNALS, SOUND SIGNALS AND INTERACTIVE SERVICES –

Part 1: System performance of forward paths

1 Scope

This part of IEC 60728 is applicable to any cable network (including individual receiving systems) having in the forward path a coaxial cable output and primarily intended for television and sound signals operating between about 30 MHz and 3 000 MHz.

This part of IEC 60728 specifies the basic methods of measurement of the operational characteristics of cable network having coaxial cable outputs in order to assess the performance of these systems and their performance limits.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-705, *International Electrotechnical Vocabulary – Chapter 705: Radio wave propagation*

IEC 60050-712:1992, *International Electrotechnical Vocabulary – Chapter 712: Antennas*

IEC 60050-725, *International Electrotechnical Vocabulary (IEV) – Chapter 725: Space radiocommunications*

IEC 60728-1-1, *Cable networks for television signals, sound signals and interactive services – Part 1-1: RF cabling for two way home networks*

IEC 60728-1-2, *Cable networks for television signals sound signals and interactive services – Part 1-2: Performance requirements for signals delivered at the system outlet in operation*

IEC 60728-2, *Cable networks for television signals, sound signals and interactive services – Part 2: Electromagnetic compatibility for equipment*

IEC 60728-3:2010, *Cable networks for television signals, sound signals and interactive services – Part 3: Active wideband equipment for cable networks*

IEC 60728-5, *Cable networks for television signals, sound signals and interactive services – Part 5: Headend equipment*

IEC 60728-10, *Cable networks for television signals, sound signals and interactive services – Part 10: System performance of return paths*

IEC 60728-11, *Cable networks for television signals, sound signals and interactive services – Part 11: Safety*