

BSI Standards Publication

Digital addressable lighting interface

Part 202: Particular requirements for control gear — Self-contained emergency lighting (device type 1)



National foreword

This British Standard is the UK implementation of EN IEC 62386-202:2023. It is identical to IEC 62386-202:2022. It supersedes BS EN 62386-202:2009, which will be withdrawn on 19 January 2026.

The UK participation in its preparation was entrusted to Technical Committee CPL/34/3, Auxiliaries for lamps.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

© The British Standards Institution 2023 Published by BSI Standards Limited 2023

ISBN 978 0 539 01066 4

ICS 29.140.50; 29.140.99

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 28 February 2023.

Amendments/corrigenda issued since publication

Date Text affected

EUROPEAN STANDARD NORME EUROPÉENNE EUROPÄISCHE NORM

EN IEC 62386-202

February 2023

ICS 29.140.50; 29.140.99

Supersedes EN 62386-202:2009

English Version

Digital addressable lighting interface - Part 202: Particular requirements for control gear - Self-contained emergency lighting (device type 1)

(IEC 62386-202:2022)

Interface d'éclairage adressable numérique - Partie 202: Exigences particulières pour les appareillages de commande - Blocs autonomes d'éclairage de secours (dispositifs de type 1) (IEC 62386-202:2022) Digital adressierbare Schnittstelle für die Beleuchtung - Teil 202: Besondere Anforderungen an Betriebsgeräte - Notbeleuchtung mit Einzelbatterie (Gerätetyp 1) (IEC 62386-202:2022)

This European Standard was approved by CENELEC on 2023-01-19. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and the United Kingdom.



European Committee for Electrotechnical Standardization Comité Européen de Normalisation Electrotechnique Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

EN IEC 62386-202:2023 (E)

European foreword

The text of document 34/986/FDIS, future edition 2 of IEC 62386-202, prepared by IEC/TC 34 "Lighting" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN IEC 62386-202:2023.

The following dates are fixed:

- latest date by which the document has to be implemented at national (dop) 2023-10-19 level by publication of an identical national standard or by endorsement
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2026-01-19

This document supersedes EN 62386-202:2009 and all of its amendments and corrigenda (if any).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

Any feedback and questions on this document should be directed to the users' national committee. A complete listing of these bodies can be found on the CENELEC website.

Endorsement notice

The text of the International Standard IEC 62386-202:2022 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standard indicated:

IEC 60598-2-22:2021	NOTE	Approved as EN IEC 60598-2-22:2022 (not modified)
IEC 61347-1:2015	NOTE	Approved as EN 61347-1:2015 (not modified)
IEC 61347-2-7:2011	NOTE	Approved as EN 61347-2-7:2012 (not modified)
IEC 62034:2012	NOTE	Approved as EN 62034:2012 (not modified)
IEC 62386-220	NOTE	Approved as EN IEC 62386-220

EN IEC 62386-202:2023 (E)

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 Where an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	EN/HD	<u>Year</u>
IEC 62386-101	2022	Digital addressable lighting interface - Part 101: General requirements - System components	EN IEC 62386-101	2022
IEC 62386-102	2022	Digital addressable lighting interface - Part 102: General requirements - Control gear	EN IEC 62386-102	2022

- 2 - IEC 62386-202:2022 © IEC 2022

CONTENTS

FC	DREWO	RD	5
IN	TRODU	CTION	7
1	Scop	e	9
2	Norm	ative references	9
3	Term	s and definitions	9
4		eral	
_	4.1	General	
	4.1	Version number	
	4.2	Power supply of bus units	
	4.4	Power interruption at bus units	
	4.4.1	General	
	4.4.2		
	4.4.3		
	4.4.4		
5		rical specification	
		ace power supply	
6			
7		smission protocol structure	
8	Timir	ıg	. 14
9	Meth	od of operation	. 14
	9.1	General	. 14
	9.2	Command execution	. 14
	9.3	Non-controllable control gear	.14
	9.3.1	General	. 14
	9.3.2	Command execution of non-controllable control gear	.14
	9.3.3	Status bits of non-controllable control gear	. 15
	9.4	Emergency level	. 15
	9.4.1	General	. 15
	9.4.2	Emergency operation light output and emergency level	.15
	9.4.3	Emergency physical maximum and minimum level	. 15
	9.4.4	Configuring emergency level	.16
	9.4.5	Testing of emergency level	.16
	9.5	Mode transition timing and behaviour	. 16
	9.6	System failure	. 18
	9.7	Modes of operation	. 18
	9.7.1	General	.18
	9.7.2	Normal mode	. 19
	9.7.3	Inhibit mode	. 20
	9.7.4	Emergency mode	.21
	9.7.5	Extended emergency mode	. 22
	9.7.6	Rest mode	. 23
	9.7.7	Mode 'Function test in progress'	. 24
	9.7.8	Mode 'Duration test in progress'	.25
	9.7.9	,	
	9.8	Emergency test functions and configuration	.27
	9.8.1	General	. 27
	9.8.2	Automatic testing	. 27

IEC 62386-202:2022 © IEC 2022 - 3 -

9.8.3	Automatic test execution status	30
9.8.4	Querying test results	31
9.8.5	Extended test duration	31
9.8.6	Timing definitions	32
9.9 Pro	tection functionalities in emergency mode	33
	ergency mode and operating modes	
	dwired emergency inputs	
9.11.1	General	
9.11.2	Hardwired inhibit input	
9.11.3	Hardwired switch	
	ntrol gear status and capabilities	
9.12.1	General	
9.12.2	Modification to "lampOn"	
9.12.3	Rated duration and battery charge	
9.12.4	Emergency status	
9.12.5	Emergency mode	
9.12.5	Emergency features	
9.12.0	Emergency failure status	
_		
9.12.8	Hardwired switch status	
9.12.9	Emergency lamp operation time	
	stricting device type support	
	allation inhibit	
	mory banks	
9.15.1	General	
9.15.2	Accuracy of measurements	
9.15.3	Rounding of measurement values	
9.15.4	Refresh rate of memory bank values	
9.15.5	No overflow of counters	
9.15.6	Memory bank 208: Emergency control gear information	
10 Declarati	on of variables	45
10.1 Ger	neral	45
10.2 lmp	act on control gear variables depending on control gear type	45
10.3 Cor	ntrol gear variables for all self-contained control gear	46
11 Definition	of commands	47
11.1 Ger	neral	47
	erview sheets	
	el instructions	
	nfiguration instructions	
11.4.1	General	
11.4.2	IDENTIFY DEVICE	
	eries	
11.5.1	General	
11.5.2	QUERY ACTUAL LEVEL	
	slication extended commands	
11.6.1	General	
11.6.1	Configuration instructions	
_	•	
11.6.3	Queries	
•	ecial commands	
11./.1	General	58

11.7.2 ENABLE DEVICE TYPE (data)	58
Annex A (informative) Enabling or re-enabling installation inhibit	59
A.1 General	59
A.2 Re-enabling installation inhibit	59
A.3 Modifying or cancelling installation inhibit operation	
Bibliography	60
	_
Figure 1 – IEC 62386 graphical overview	
Figure 2 – Modes and transitions	
Figure 3 – Timing diagram for function and duration tests	
Figure 4 – Duration test execution time out example	31
Table 1 – Mode transition behaviour	17
Table 2 – Bus power interruption behaviour	
Table 3 – Normal mode	
Table 4 – Inhibit mode	
Table 5 – Emergency mode	
Table 6 – Extended emergency mode	
Table 7 – Rest mode	
Table 8 – Mode 'Function test in progress'	
Table 9 – Mode 'Duration test in progress'	
Table 10 – Mode 'Battery cut-off'	
Table 11 – "extendedDuration"	
Table 12 – Timing definitions	
Table 13 – "emergencyStatus"	
Table 14 – "emergencyMode"	
Table 15 – "emergencyFeatures"	36
Table 16 – "emergencyFailureStatus"	37
Table 17 – "hardwiredSwitchStatus"	38
Table 18 – Memory bank 208: Self-contained emergency control gear information	40
Table 19 – Modifications of control gear variables	45
Table 20 – Declaration of additional variables	
Table 21 – Application extended commands	48
Table 22 – Perform DTR selected function	
Table 23 – Query selected variable	56

INTERNATIONAL ELECTROTECHNICAL COMMISSION

DIGITAL ADDRESSABLE LIGHTING INTERFACE -

Part 202: Particular requirements for control gear – Self-contained emergency lighting (device type 1)

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 62386-202 has been prepared by IEC technical committee 34: Lighting. It is an International Standard.

This second edition cancels and replaces the first edition published in 2009. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) scope updated,
- b) hardwired switch operation can be disabled,
- c) installation inhibit feature added,
- d) memory bank added,
- e) modes of operation clarified, with some changes and additions,
- f) command added to enter extended emergency mode,

g) command added to extend time in duration test mode.

The text of this International Standard is based on the following documents:

Draft	Report on voting
34/986/FDIS	34/1000/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

This Part 202 of IEC 62386 is intended to be used in conjunction with:

- Part 101, which contains general requirements for system components;
- Part 102, which contains general requirements for control gear.

A list of all parts in the IEC 62386 series, published under the general title *Digital addressable lighting interface*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

IEC 62386 contains several parts, referred to as series. The IEC 62386 series specifies a bus system for control by digital signals of electronic lighting equipment. The IEC 62386-1xx series includes the basic specifications. Part 101 contains general requirements for system components, Part 102 extends this information with general requirements for control gear and Part 103 extends it further with general requirements for control devices. Part 104 and Part 105 can be applied to control gear or control devices. Part 104 gives requirements for wireless and alternative wired system components. Part 105 describes firmware transfer. Part 150 gives requirements for an auxiliary power supply which can be stand-alone, or built into control gear or control devices.

The IEC 62386-2xx series extends the general requirements for control gear with lamp specific extensions (mainly for backward compatibility with Edition 1 of IEC 62386) and with control gear specific features.

The IEC 62386-3xx series extends the general requirements for control devices with input device specific extensions describing the instance types as well as some common features that can be combined with multiple instance types.

This second edition of IEC 62386-202 is intended to be used in conjunction with IEC 62386-101 and IEC 62386-102 and with the various parts that make up the IEC 62386-2xx series for control gear, and can be used together with IEC 62386-103 and the various parts that make up the IEC 62386-3xx series of particular requirements for control devices. The division into separately published parts provides for ease of future amendments and revisions. Additional requirements will be added as and when a need for them is recognised.

The setup of the standards is graphically represented in Figure 1 below.

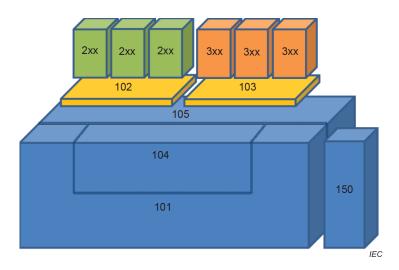


Figure 1 – IEC 62386 graphical overview

When this part of IEC 62386 refers to any of the clauses of the IEC 62386-1xx series, the extent to which such a clause is applicable is specified. The other parts also include additional requirements, as necessary.

All numbers used in this document are decimal numbers unless otherwise noted.

-8-

Hexadecimal numbers are given in the format 0xVV, where VV is the value. Binary numbers are given in the format XXXXXXXX or in the format XXXX XXXX, where X is 0 or 1 and "x" in binary numbers means "don't care". Where a variable is referred by a bit number, bit 0 is the least significant bit.

The following typographic expressions are used:

Variables: variableName or variableName[3:0], giving only bits 3 to 0 of variableName;

Range of values: [lowest, highest]; Command: "COMMAND NAME".

DIGITAL ADDRESSABLE LIGHTING INTERFACE -

Part 202: Particular requirements for control gear – Self-contained emergency lighting (device type 1)

1 Scope

This part of IEC 62386 is applicable to control gear for control by digital signals of electronic lighting equipment which is associated with self-contained emergency lighting as described in IEC 61347-2-7 with additional control interface for configuring emergency operation.

This document is only applicable to control gear complying with IEC 62386-102.

This document does not apply to centrally supplied emergency lighting control gear, which is specified in IEC 62386-220.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62386-101:2022, Digital addressable lighting interface – Part 101: General requirements – System components

IEC 62386-102:2022, Digital addressable lighting interface – Part 102: General requirements – Control gear

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 62386-101 and IEC 62386-102 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at https://www.electropedia.org/
- ISO Online browsing platform: available at https://www.iso.org/obp

3.1

battery cut-off

mode of operation in which the normal supply is disconnected and the battery voltage is below the battery cut-off voltage

Note 1 to entry: Reaching this point can trigger the device to protect against extensive discharge as defined in IEC 61347-2-7:2011, 3.4 and IEC 61347-2-7:2011/AMD2:2021, 3.4.

3.2

battery cut-off voltage

battery voltage, below which the battery can no longer power the control gear or lamp(s)